

## REPLACEMENT GRASS BAG 753-06118



### WARNING!

BEFORE INSTALLING THIS ACCESSORY, SHUT THE UNIT'S ENGINE OFF AND ALLOW IT TO COOL. DISCONNECT SPARK PLUG WIRE FROM SPARK PLUG. REFER TO THE OPERATOR'S MANUAL FOR COMPLETE SAFETY INSTRUCTIONS. DO NOT OPERATE UNIT WITHOUT ENTIRE GRASS COLLECTOR IN PLACE. STOP BLADE BEFORE EMPTYING GRASS COLLECTOR.

### Grass Bag Installation

1. Place grass bag (A, Fig. 1) over chute assembly (B).
2. Insert pointed end of plastic cable tie (C) into eyelet end of cable tie. Make sure cable is positioned so it ties bag around indented groove portion (over flange) of chute. Pull cable tight with pliers.

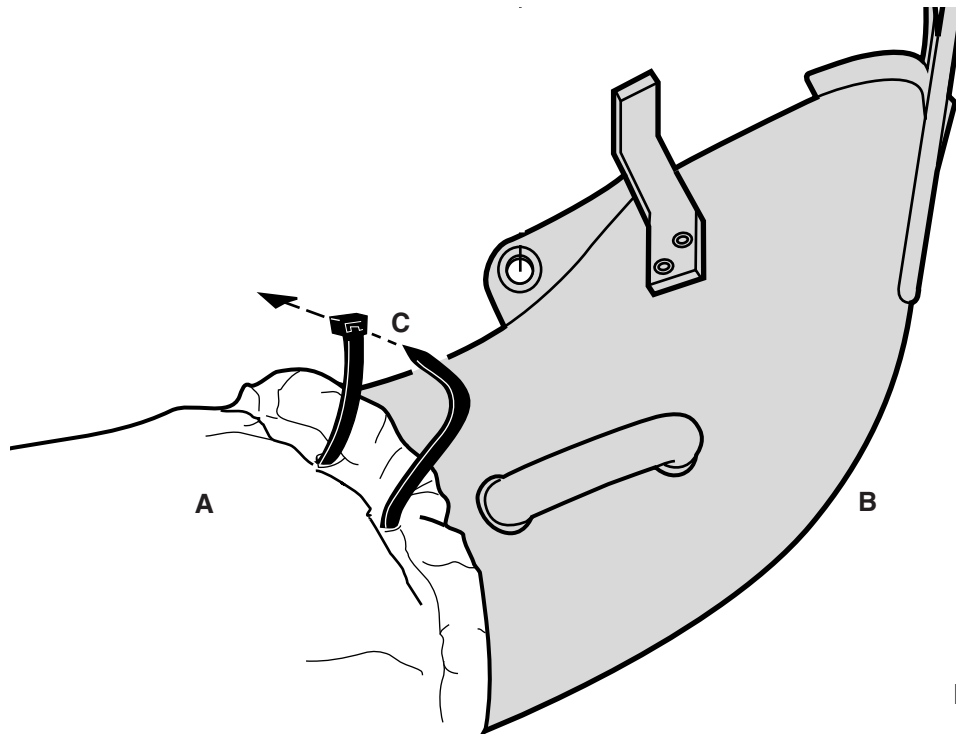


Fig. 1

For customer assistance, visit [www.mtdproducts.com](http://www.mtdproducts.com), contact your nearest authorized dealer or:

MTD LLC, P.O. BOX 361131, CLEVELAND, OHIO 44136-0019