

Supplement Sheet

Date: January 28, 2010

Subject: Discharge Chute Straps

Model(s): 19A400020EM 19A40002100 19A40002000

19A700040EM 19A70004100 19A700080EM

19A70008100 19A40007100 19A40009100

The retainer strap which secure the discharge chute to the cutting deck may be packed separately. Follow the steps below and refer to the illustrations to properly mount the strap to your cutting deck.

Attaching the Retainer Strap

1. Secure the strap to the chute with the hex screw and flange nut provided. See Fig. 1-1.

Note: For all lawn tractors (LTs) equipped with a 50-inch deck, as well as super lawn tractors (SLTs) equipped with a 54-inch deck, secure the strap in the upper hole.

Note: For all garden tractors (GTs) equipped with a 54-inch deck, secure the strap in the lower hole.

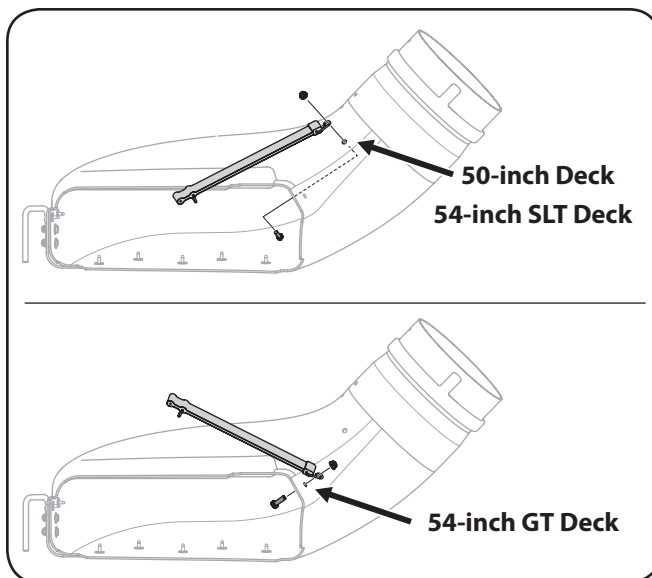


Figure 1-1

For garden tractors equipped with a 54-inch deck, an additional retainer clip (and hardware) used to secure the discharge chute to the cutting deck has been packed separately.

Attaching the Retainer Clip

There are two hole locations on the rear, right portion of the cutting deck, near the water port. If your tractor's deck already has a retainer clip in the correct location, discard the retainer clip included in the hardware pack and disregard the following steps.

1. Locate the hole labeled Correct Location in Fig. 1-2.
2. Secure the retainer clip to the cutting deck using the hex bolt and flange nut provided. See Fig. 1-2.

Note: Always use this retainer clip in the Correct Location when attaching the retainer strap to the deck.

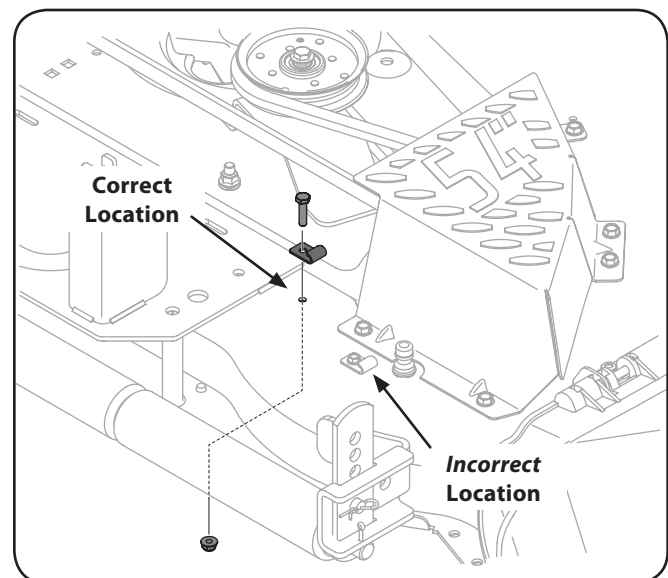


Figure 1-2

MTD LLC, P.O. BOX 361131 CLEVELAND, OHIO 44136-0019