Corrected

Models **36,41**


Silencer complete

We have introduced a silencer bolt with a diameter of 6 mm from serial number 2390902. The old one was 5 mm.

The following ref.numbers are valid:

New ref.no.	Description	Excluded ref.no.	Remark
	Silencer, body	530 02 98-07	1
530 03 72-51	silencer cover	530 02 98-08	1
530 03 72-54 530 03 72-46	Flame protectorr	530 02 98-09	
530 03 72-46	Bolt	530 01 58-98	•
530 01 00-44	Cylinder compl. 36 cc	530 01 43-03	2
530 01 48-22	Cylinder compl. 40 cc	530 01 43-50	2

- **Remark:** 1 = Replaced parts are excluded as spare parts. When using old parts and a new bolt 530 01 60-44, the two holes must be adjusted. Use a drill with a diameter of 6,5 mm. (See illustration).
 - 2 = Replaced parts are excluded as spare parts. When using old cylinders and a new bolt, 530 0160-44, the two holes must be made bigger. Use a drill with a diameter 5,5 mm and drill to a depth of 17,5 mm (See illustration).
 - * = When using a new bolt, a new flame protector must be used.

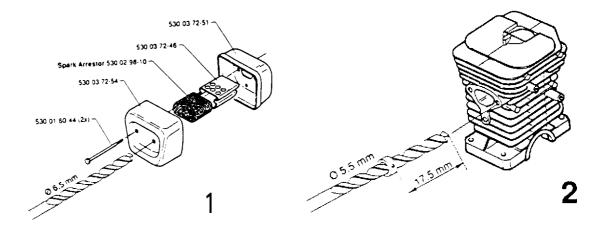

5:X 92.125-26a 3.46 03-93