


MODEL: 250PS

SUBJECT: CHAIN LUBRICATION ADJUSTMENT



Warning! When making adjustments the engine must be turned off.

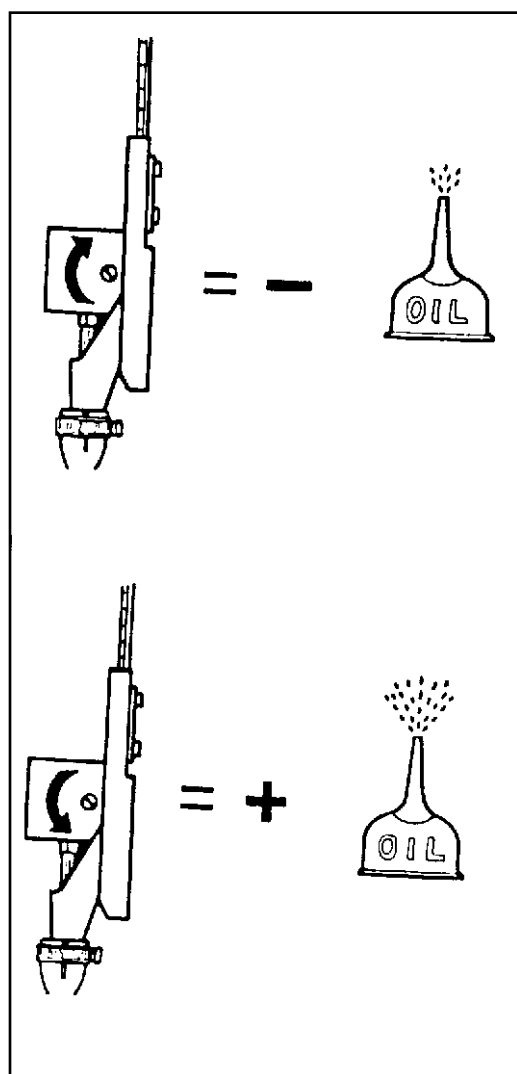

The amount of oil used to lubricate the chain can be adjusted. The standard amount of adjustment is a half turn. Turn screw clockwise to reduce the oil supply and counterclockwise to increase the oil supply.

NOTE! Never turn the adjusting screw in completely. This stops the oil supply resulting in damage to the bar and chain.