
For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH100-115097E Page 1 of 9 Engine Parts List #1

ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

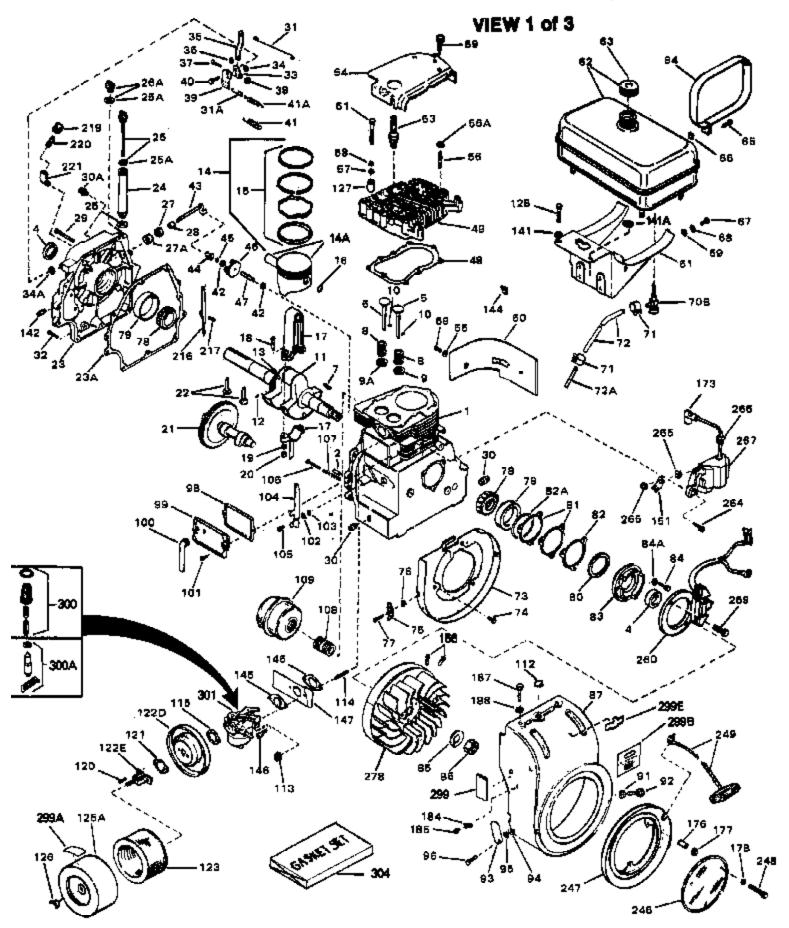


Dof #	Port Number		Description
	Part Number 33039	Qly	Description Cylinder (Incl.2,4,30,47,119) (3-5/16 ")
	27652		Pin, Dowel
	31950		Seal, Oil
	31940		Intake Valve (Std.)
	31941		Intake Valve (1/32" OS) (Incl. 9)
	31942		Exhaust Valve (Std.)
	31943		Exhaust Valve (1/32" OS) (Incl. 9)
	650592		Key, Flywheel
	31944		Spring, Valve
	31946		Cap, Lower valve spring (1/32" OS)
	31945		Cap, Lower valve spring (Std.)
	31945		Cap, Lower valve spring (Std.)
	31946		Cap, Lower valve spring (1/32" OS)
	20810		Pin, Valve spring retainer
	33391B		Crankshaft (Incl. 12, 13, 78 & 79)
	29783		Pin, Crankshaft gear
	31931		Gear, Crankshaft
	34508		Piston, Pin & Ring Set (Std.) (3-5/16 " Bore)
	34509		Piston, Pin & Ring Set (.010" OS)
	34510		Piston, Pin & Ring Set (.020" OS)
	34850		Piston, Pin & Ring Set (.030" OS)
14	34523		Piston, Pin & Ring Set (.040" OS)
	32620B		Piston & Pin Ass'y. (.040" OS) (Incl. 16)
14A	32001C		Piston & Pin Ass'y. (Std.)(Incl.16)(3 -5/16")
14A	32002B		Piston & Pin Ass'y. (.010" OS) (Incl. 16)
14A	32003B		Piston & Pin Ass'y. (.020" OS) (Incl. 16)
14A	32619B		Piston & Pin Ass'y. (.030" OS) (Incl. 16)
15	32004		Ring Set (Std.) (3-5/16" Bore)
15	32005		Ring Set (.010" OS)
15	32006		Ring Set (.020" OS)
15	32623		Ring Set (.030" OS)
15	32624		Ring Set (.040" OS)
15	32321		Re-Ringing Set, Piston
16	31919		Ring, Piston pin retaining
17	33093A		Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)
17	34383		Connecting Rod Assy.(.010" US)(Incl.1 8,19,20)
17	34384		Connecting Rod Assy.(.020" US)(Incl.1 8,19,20)
18	32077		Bolt, Connecting rod
19	26073		Washer, Connecting rod
20	28264		Nut Assy., Lock
21	32150		Camshaft (MCR)
22	31939		Lifter, Valve
23	32580A		Cover, Cylinder (Incl. 4, 28, 30, 34, & 43)
23A	31956A		* Gasket, Cylinder cover
24	33893A		Oil Fill Tube
25A	33590		"O" Ring
25A	35499		"O" Ring
26	33984A		Dipstick (Incl. 25A)
28	32426		Spacer, Governor rod
29	650588		Screw, 1/4-20 x 2"
30A	31927		Oil Drain Plug
30	31927		Oil Drain Plug
31	31968		Link, Governor
32	650451		Screw, 1/4-20 x 1"
33	31964		Clamp, Governor lever
34	29193		Ring, Retaining
35	31963		Lever, Governor adjusting
36	650518		Lockwasher
	$\mathbf{w}\mathbf{w}\mathbf{w}\mathbf{w}\mathbf{m}\mathbf{w}\mathbf{m}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}\mathbf{n}n$	XX/	ernarts com

	Part Number Qty	
37	650544	Screw, 10-24 x 7/8"
38	7975	Nut, 10-24
	31965	Plate, Governor spring
	30312	Screw, 10-32 x 1/2"
	31967	Spring, Governor
	30590A	Washer, Flat
	32425	
		Rod Assy., Governor
	31948	Spool, Governor
	29193	Ring, Retaining
	31947	Gear Assy., Governor
	31930	Shaft, Mechanical Governor
	32000A	* Gasket, Cylinder head
	33034	Head, Cylinder
51	650694A	Screw, 5/16-18 x 2" (Use as required)
51	650711	Screw, 5/16-18 x 1-5/8" (Use as requi red)
51	650628A	Screw, 5/16-18 x 2-3/8" (Use as required)
51	650695A	Screw, 5/16-18 x 2-1/4" (Use as required)
	650714	Screw, 5/16-18 x 1-5/8" (Use as requi red)
	650697A	Screw, 5/16-18 x 2-1/2" (Use as required)
	650692	Screw, 5/16-18 x 1-3/4" (Use as required)
	650603	Screw, $5/16-18 \times 5/8"$ (Use as required)
	33636	Resistor Spark Plug (RJ-8C)
	34251	Resistor Spark Plug (RJ-17LM)
	33035	Cover, Cylinder head
	28537	Washer, Plain
	650691	Washer, Flat (Use as required)
	650690	Washer, Belleville (Use as required)
	8274	Washer, Lock (Use as required)
59	650128	Screw, 10-24 x 1/2"
60	31976	Extension, Blower housing
63	410144B	Fuel Cap (White Plastic)(Std.)(As req uired)
63	34210	Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as
		required)
	650517	Screw, 1/4-20 x 27/32" (Use as requir ed)
67	650561	Screw, 1/4-20 x 5/8" (Use as required )
67	30063	Screw, 1/4-20 x 1/2" (Use as required )
67	792028	Screw, 5/16-18 x 7/8" (Use as require d)
71	26460	Clamp, Fuel line (Use as required)
72	29774	Fuel Line (Braided) (8.25") (Use as r equired)
	30705	Fuel Line (Braided) (16") (Use as req uired)
	30962	Fuel Line (Braided) (32") (Use as req uired)
	30965	Fuel Line (Braided) (48") (Use as req uired)
	32579	Baffle, Blower housing
	650561	
		Screw, 1/4-20 x 5/8"
	31932	Bearing, Tapered roller
	31928	
80	32031	Spacer, Steel (.010" thick) NOTE: Determine the gap
		between the cover and the machined surface on the cylinder
		which can be from .001"up to .007" in which case no shim
		gaskets will be required. Use of gasket must be limited to a
		combined total of .010" thick. Steel spacersmust be used
		as required
		as required

<ul> <li>81 31971</li> <li>* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req</li> <li>82 31972</li> <li>* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req</li> <li>82 31972</li> <li>* Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req</li> <li>82A 32599</li> <li>* O" Ring</li> <li>Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be</li> </ul>	Ref #	Part Number Qt	y Description
between the cover and the machined surface on the cylindic which can be from .001*up to .007* in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010* thick. Steel spacersmust be used as req *0* Ring Cover, Cylinder NOTE: Determine the gap between the cov and the machined surface on the cylinder which can be from .001*up to .007* in which case no shim gaskets will be required. Use of gasket must be limited to a combined tot of .010* thick. Steel spacersmust be used as required to eliminat 84A 650679 Lockwasher, 5/16* (Use as required) 44 792028 Screw, 5/16-18 × 7/8* 85 650666 Washer, Lock 86 650594 Nut, Flywheel, 34-16 87 33044A Biower Hsg. (Incl.73) (For electric s tarter) 91 8274 Washer, Lock 92 650595 Screw, 5/16-24 × 3/8* 95 8274 Washer, Lock 96 650624 Screw, 5/16* 93 1958 * Gasket, Breather 93 31957 Breather 93 31957 Breather 101 650128 Screw, 5/16* 102 28558 Washer, Lock 103 31966 Bushing, Control lever 104 31994A Lever, Control 105 650597 Screw, 10-24 × 12* 107 33098 Spring 112 33038 Plug, Button (Use as required) 115 2772 * Gasket, Ar deaner 126 50399 Screw, 10-24 × 5/8* 127 30767 Spacer, Air deaner 128 50429 Screw, 5/16-18 × 5/8* (Use as required) 128 650713 Screw, 5/16-18 × 5/8* (Use as require d) 128 650713 Screw, 5/16-18 × 5/8* (Use as require d)			* Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
8332577Cover, $\tilde{C}$ ylinder NOTE: Determine the gap between the cov and the machined surface on the cylinder which case hoe from .001'up to .007'in which case no shin gaskets will be required. Use of gasket must be limited to a combined tota of .010' thick. Steel spacersmust be used as required to eliminat84A650679Lockwasher, 5/16" (Use as required)84732028Screw, 5/16-18 x 7/8'85650666Washer, Lock86650594Nut, Flywheel, 3/4-168733044ABlower Hsg. (Incl.73) (For electric s tarter)918274Washer, Lock958274Washer, Lock96650695Screw, 5/16-24 x 3/8'9381958* Gasket, Breather9331957Breather Assy.101650128Screw, 10-24 x 1/2'10222558Washer, Wave10331966Bushing, Control lever10431984ALever, Control105650591Screw, 10-24 x 5/8''106650591Screw, 10-24 x 5/8''10733099Spring1123038Plug, Button (Use as required)1152727* Gasket, Air cleaner120650391Screw, 10-24 x 5/8''1210767Spacer, Air cleaner12265039Screw, 10-24 x 5/8''123650713Screw, 5/16-18 x 3/4'' (Use as required)124650429Screw, 5/16-18 x 3/4'' (Use as required)	82	31972	gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used
84792028Screw, $5/16-18 \times 7/8"$ 85650666Washer, Lock86650594Nut, Flywheel, $3/4+16$ 8733044ABlower Hsg. (Incl.73) (For electric s tarter)918274Washer, Lock92650595Screw, $5/16-24 \times 3/8"$ 96650624Screw, $5/16-24 \times 9/16"$ 9831958* Gasket, Breather9931957Breather Assy.10035350Tube, Breather101650128Screw, $10-24 \times 1/2"$ 10228558Washer, Wave10331966Bushing, Control lever10431984ALever, Control105650597Screw, $10-24 \times 5/8"$ 106650591Screw, $10-24 \times 2^*$ 10733099Spring1123038Plug, Button (Use as required)11527272* Gasket, Air cleaner120650513Nut, Wing12130767Spacer, Air cleaner122650513Nut, Wing128650713Screw, $5/16-18 \times 5/8"$ (Use as require d)128650713Screw, $5/16-18 \times 3/4"$ (Use as require d)			Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to
141A8274Lockwasher, Split (Use as required)14126073Washer, Flat (Use as required)14533263* Gasket, Carburetor146650451Screw, 1/4-20 x 1"14734061Baffle, Air151610908Terminal, Female156730201Trigger Pin Kit (Use as required)173610118Cover, Spark plug (Use as required)	84 85 86 87 91 92 95 96 98 99 100 101 102 103 104 105 106 107 112 115 120 121 125A 126 128 128 128 128 128 128 128 128 141A 141 145 146 147 151	792028         650666         650594         33044A         8274         650595         8274         650624         31958         31957         35350         650128         28558         31966         31984A         650597         650591         33038         27272         650399         30767         32810         650513         650713         650713         650713         650743         33263         650451         34061         610908         730201	Screw, 5/16-18 x 7/8" Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Plug, Button (Use as required) * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Cover, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) Screw, 1/4-20 x 1" Baffle, Air Terminal, Female Trigger Pin Kit (Use as required)

Ref #	Part Number	Qty	Description
177	8345		Washer, 1/4 plain (Use as required)
178	27070		Washer, Lock 1/4 E.T. (Use as require d)
178	650675		Washer, Flat 1/4 (Use as required)
184	27793		Clip, Conduit
185	28942		Screw, 10-32 x 3/8"
246	33776		Screen, Starter pulley
248	650670		Screw, 1/4-20 x 3/4"
	32046		Rope Assy., Starter (Use as required)
	650661		Screw, 1/4-20 x 3/4"
	610408		Nut, Hex
	610750		Grommet, Lead wire
	610906		Solid State Magneto (Incl.151,173,265,266)(20 Amp)
	610901		Solid State Flywheel
299B	32676		Decal, Solid State
	31752		Decal, Air cleaner
299	34346		Decal, Instruction
300A	631021		Inlet Needle, Seat & Clip Assy.
301	631877		Carburetor (Incl. 145) (Refer to Division 5, Section A, page 134 for breakdown)
304	33237A		* Gasket Set (Incl. items marked *)

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH100-115097E Page 6 of 9 Engine Parts List #2

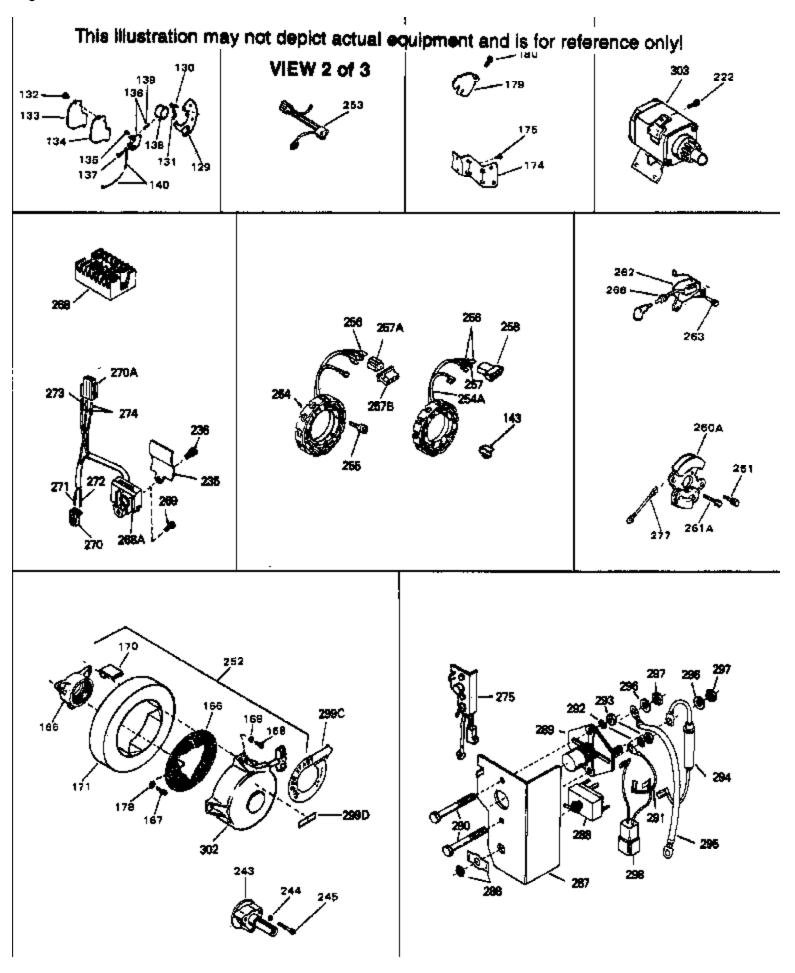


## For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH100-115097E Page 7 of 9 Engine Parts List #2

Ref #	Part Number	Qty Description
178	27070	Washer, Lock 1/4 E.T. (Use as require d)
178	650675	Washer, Flat 1/4 (Use as required)
180	650701	Screw, 8-18 x 7/16" (Use as required)
222	792028	Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)
222	650781	Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)
235	34276	Plate, Cover (Use as required to cover regulator mounting hole in blower housing)
236	650736	Screw, 10-16 x 3/8" (Use as required)
	730134	Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)
253	33018	Harness Assy., Adapter (Use as requir ed)
254A	610902	Alternator Coil (20 Amp)(Incl.256,257,258)
255	650521	Screw, 10-32 x 1-1/8"
256	610905	Terminal
257B	610824	Flat Connector (Female terminals) (As req.)
257	610904	Terminal
258	610903	Connector, Flat
266	610750	Grommet, Lead wire
268	610907A	Regulator (20 Amp) (Incl.268A, 269 & 298)
275	730198	Starter Switch Kit(Incl. 287-298) (As req.)
303	33835	Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown.

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH100-115097E Page 8 of 9 Engine Parts List #3

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

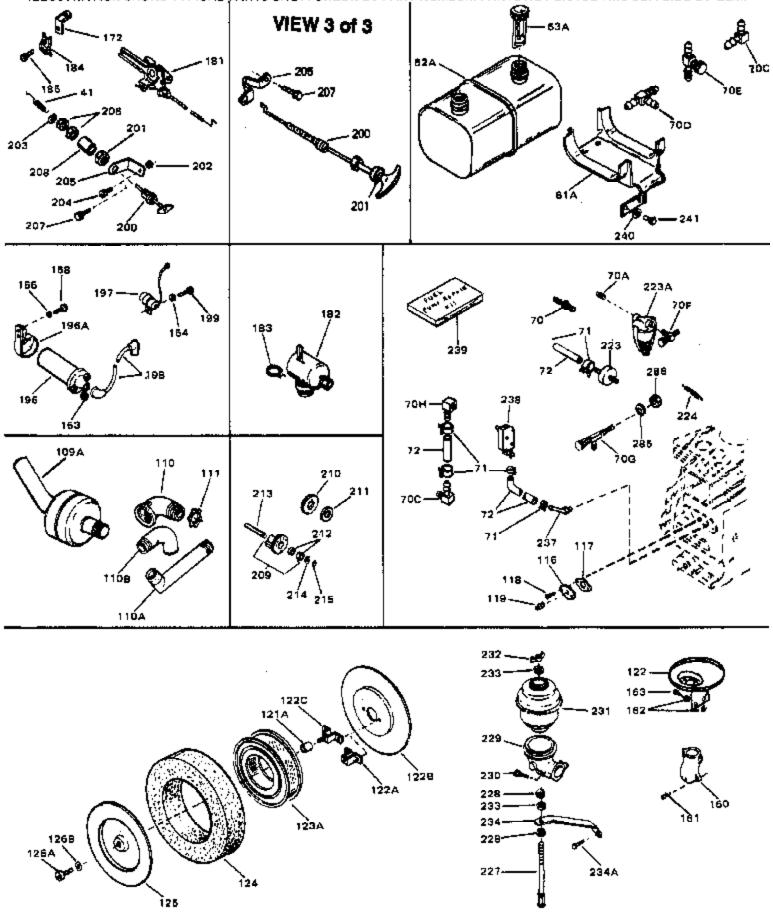

Ref #	Part Number	Qty	Description
41	31967		Spring, Governor
71	26460		Clamp, Fuel line (Use as required)
72	29774		Fuel Line (Braided) (8.25") (Use as r equired)
72	30705		Fuel Line (Braided) (16") (Use as req uired)
72	30962		Fuel Line (Braided) (32") (Use as req uired)
72	30965		Fuel Line (Braided) (48") (Use as req uired)
119	28534		Pipe Plug, 1/8-27 (Use as required)
119	9556		Plug, Pipe, 1/8-27 (Use as required)
122B	34065		Bracket, Air cleaner
122C	32907B		Bracket, Air cleaner
123A	32008		Element, Air cleaner
172	30208		Bracket, Choke control
184	27793		Clip, Conduit
185	28942		Screw, 10-32 x 3/8"