
For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH120-120079C Page 1 of 9 Engine Parts List #1

ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEM.

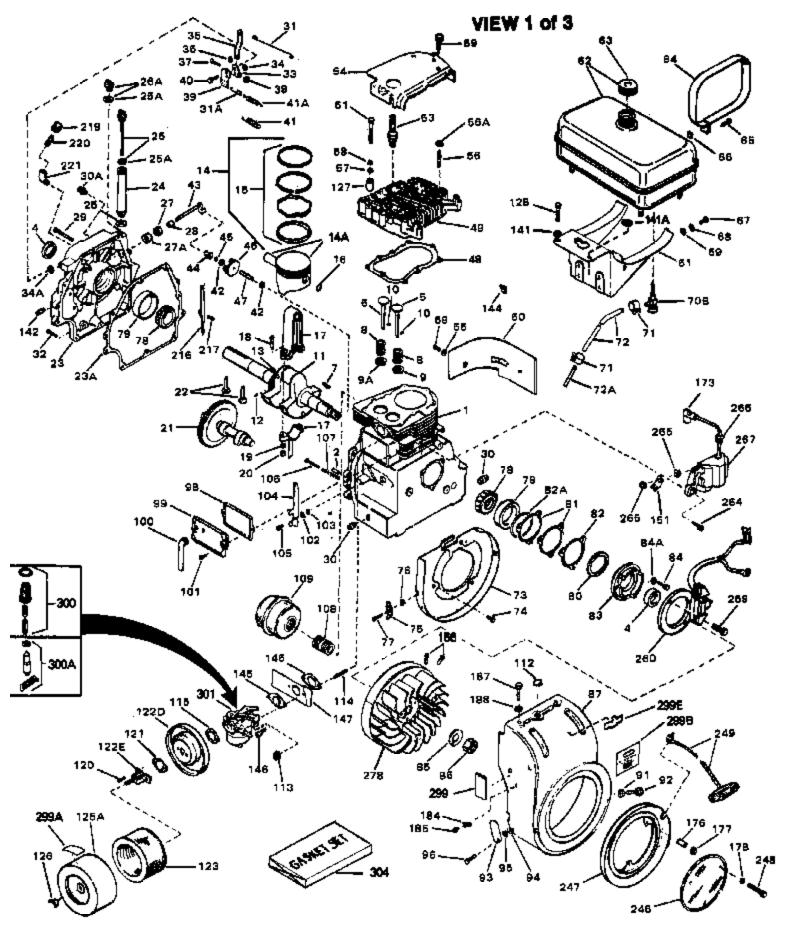


| Ref # | Part Number Q | ty Description |
|-------|----------------|--|
| | 33042 | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore) |
| | 27652 | Pin, Dowel |
| | 31950 | Seal, Oil |
| | 31940 | Intake Valve (Std.) |
| 5 | 31941 | Intake Valve (1/32" OS) (Incl. 9) |
| 6 | 31942 | Exhaust Valve (Std.) |
| 6 | 31943 | Exhaust Valve (1/32" OS) (Incl. 9) |
| 7 | 650592 | Key, Flywheel |
| 8 | 31944 | Spring, Valve |
| 9 | 31946 | Cap, Lower valve spring (1/32" OS) |
| 9 | 31945 | Cap, Lower valve spring (Std.) |
| 9A | 31945 | Cap, Lower valve spring (Std.) |
| | 31946 | Cap, Lower valve spring (1/32" OS) |
| | 20810 | Pin, Valve spring retainer |
| | 32293C | Crankshaft (Incl. 12, 13, 17, 78 & 79) |
| | 29783 | Pin, Crankshaft gear |
| | 31931 | Gear, Crankshaft |
| | 32238B | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") |
| | 32239B | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 32240B | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 32621B | Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
| | 32622B | Piston & Pin Ass'y. (.040" OS) (Incl. 16) |
| | 34511 | Piston, Pin & Ring Set (Std.) (3-1/2" Bore) |
| | 34512 | Piston, Pin & Ring Set (.010" OS) |
| | 34513 | Piston, Pin & Ring Set (.020" OS) |
| | 34524 | Piston, Pin & Ring Set (.030" OS) |
| | 34525 | Piston, Pin & Ring Set (.040" OS) |
| | 32241 | Ring Set (Std.) (3-1/2" Bore) |
| | 32242 | Ring Set (.010" OS) |
| | 32243 | Ring Set (.020" OS) |
| | 32625 | Ring Set (.030" OS) Bing Set (.040" OS) |
| | 32626 | Ring Set (.040" OS) |
| | 32336 31919 | Re-Ringing Set, Piston Ring, Piston pin retaining |
| | 33093A | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20) |
| | 34383 | |
| | 34384 | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
| | 32077 | Bolt, Connecting rod |
| | 26073 | Washer, Connecting rod |
| | 28264 | Nut Assy., Lock |
| | 32150 | Camshaft (MCR) |
| | 31939 | Lifter, Valve |
| | 31956A | * Gasket, Cylinder cover |
| | 32580A | Cover, Cylinder (Incl. 4, 28, 30, 34, & 43) |
| | 31985 | Oil Fill Tube |
| | 29673 | * Gasket, Oil fill |
| | 29673 | * Gasket, Oil fill tube |
| | 33070 | Dipstick (Incl. 25A) |
| | 32426 | Spacer, Governor rod |
| | 650588 | Screw, 1/4-20 x 2" |
| | 31927 | Oil Drain Plug |
| | 31968 | Link, Governor |
| | 650451 | Screw, 1/4-20 x 1" |
| | 31964 | Clamp, Governor lever |
| | 29193 | Ring, Retaining |
| | 31963 | Lever, Governor adjusting |
| | 650518 | Lockwasher |
| | 650544 | Screw, 10-24 x 7/8" |
| 21 | | |

| | | Description |
|----|---------|--|
| | 7975 | Nut, 10-24 |
| 39 | 31965 | Plate, Governor spring |
| | 30312 | Screw, 10-32 x 1/2" |
| 41 | 31967 | Spring, Governor |
| 42 | 30590A | Washer, Flat |
| 43 | 32425 | Rod Assy., Governor |
| 44 | 31948 | Spool, Governor |
| 45 | 29193 | Ring, Retaining |
| 46 | 31947 | Gear Assy., Governor |
| 47 | 31930 | Shaft, Mechanical Governor |
| 48 | 32246A | * Gasket, Cylinder head |
| 49 | 33034 | Head, Cylinder |
| | 650694A | Screw, 5/16-18 x 2" (Use as required) |
| | 650711 | Screw, 5/16-18 x 1-5/8" (Use as required) |
| | 650628A | Screw, 5/16-18 x 2-3/8" (Use as required) |
| | 650695A | Screw, 5/16-18 x 2-1/4" (Use as required) |
| | 650714 | Screw, 5/16-18 x 1-5/8" (Use as required) |
| | 650697A | Screw, 5/16-18 x 2-1/2" (Use as required) |
| | 650692 | Screw, 5/16-18 x 1-3/4" (Use as required) |
| | 650603 | Screw, $5/16-18 \times 5/8$ " (Use as required) |
| | 33636 | Resistor Spark Plug (RJ-8C) |
| | 34251 | Resistor Spark Plug (RJ-17LM) |
| | 33035 | Cover, Cylinder head |
| | 28537 | Washer, Plain |
| | 650691 | Washer, Flat (Use as required) |
| | 650690 | Washer, Belleville (Use as required) |
| | 8274 | Washer, Lock (Use as required) |
| | 650128 | Screw, $10-24 \times 1/2$ " |
| | 31976 | Extension, Blower housing |
| | 31978 | Bracket, Fuel tank |
| | 410144B | • |
| | | Fuel Cap (White Plastic)(Std.)(As req uired) |
| 03 | 34210 | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
| | | required) |
| 64 | 31979 | Strap, Fuel tank |
| 65 | 650451 | Screw, 1/4-20 x 1" |
| | 650456 | Nut, Flange whiz-lock, 1/4-20 |
| | 650517 | Screw, 1/4-20 x 27/32" (Use as requir ed) |
| | 650561 | Screw, 1/4-20 x 5/8" (Use as required) |
| | 30063 | Screw, 1/4-20 x 1/2" (Use as required) |
| | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 8345 | Washer, Flat |
| | 8303 | Lockwasher |
| | 29683 | Strainer & Shut-off, Fuel |
| | 26460 | Clamp, Fuel line (Use as required) |
| | 29774 | Fuel Line (Braided) (8.25") (Use as required) |
| | 30705 | Fuel Line (Braided) (16") (Use as required) |
| | 30962 | Fuel Line (Braided) (10) (Use as req uired) |
| | 30965 | Fuel Line (Braided) (32) (Use as req uired) |
| | 32579 | |
| | | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" Rearing, Taparad reliar |
| | 31932 | Bearing, Tapered roller |
| 79 | 31320 | Cup, dealling |
| 79 | 31928 | Cup, Bearing |

| Ref # | Part Number G | Aty Description |
|-------|------------------|--|
| | 32031 | Spacer, Steel (.010" thick) NOTE: Determine the gap |
| | | between the cover and the machined surface on the cylinder |
| | | which can be from .001"up to .007" in which case no shim |
| | | gaskets will be required. Use of gasket must be limited to a |
| | | combined total of .010" thick. Steel spacersmust be used |
| | | as required |
| 81 | 31971 | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap |
| 0. | | between the cover and the machined surface on the cylinder |
| | | which can be from .001"up to .007" in which case no shim |
| | | gaskets will be required. Use of gasket must be limited to a |
| | | combined total of .010" thick. Steel spacersmust be used |
| | | as req |
| 82 | 31972 | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap |
| 52 | 01012 | between the cover and the machined surface on the cylinder |
| | | which can be from .001"up to .007" in which case no shim |
| | | gaskets will be required. Use of gasket must be limited to a |
| | | combined total of .010" thick. Steel spacersmust be used |
| | | as req |
| 82A | 32599 | "O" Ring |
| | 32577 | Cover, Cylinder NOTE: Determine the gap between the cover |
| | | and the machined surface on the cylinder which can be from |
| | | .001"up to .007" in which case no shim gaskets will be |
| | | required. Use of gasket must be limited to a combined total |
| | | of .010" thick. Steel spacersmust be used as required to |
| | | eliminat |
| 84A | 650679 | Lockwasher, 5/16" (Use as required) |
| | 792028 | Screw, 5/16-18 x 7/8" |
| | 650615 | Washer, Flat |
| | 650616 | Nut, Flywheel, 3/4-16 |
| | 33044A | Blower Hsg. (Incl.73) (For electric s tarter) |
| | 8274 650595 | Washer, Lock Screw, 5/16-24 x 3/8" |
| | 8274 | Washer, Lock |
| | 650624 | Screw, 5/16-24 x 9/16" |
| | 31958 | * Gasket, Breather |
| | 31957 | Breather Assy. |
| | 35350 | Tube, Breather |
| | 650128 | Screw, 10-24 x 1/2" |
| | 28558 | Washer, Wave |
| | 31966 | Bushing, Control lever |
| | 31984A | Lever, Control |
| | 650597 | Screw, 10-24 x 5/8" |
| | 650591 33000 | Screw, 10-24 x 2" |
| | 33099 32042 | Spring Nipple, Exhaust pipe |
| | 32042 32043B | Muffler |
| | 33038 | Plug, Button (Use as required) |
| | 29752 | Nut & Lockwasher Assy. |
| | 650587 | Stud, Carburetor |
| | 27272 | * Gasket, Air cleaner |
| | 650399 | Screw, 10-32 x 5/8" |
| | 30767 | Spacer, Air cleaner |
| | 32378 | Bracket, Air cleaner |
| | 32376 | Bracket, Air cleaner |
| | 32009 | Cover, Air cleaner |
| 120 | 650513 WWW mVmOV | Nut, Wing Vernarts com |
| | www.mymov | |

| Ref # | Part Number Qty | Description |
|-------|-----------------|--|
| | 650713 | Screw, 5/16-18 x 5/8" (Use as require d) |
| 128 | 650429 | Screw, 5/16-18 x 3/4" (Use as require d) |
| 128 | 792028 | Screw, 5/16-18 x 7/8" (Use as require d) |
| 141 | 26073 | Washer, Flat (Use as required) |
| 141A | 8274 | Lockwasher, Split (Use as required) |
| 145 | 31960 | * Gasket, Carburetor |
| 147 | 31959 | Baffle, Air |
| 151 | 33356 | Terminal, Ground |
| 156 | 730201 | Trigger Pin Kit (Use as required) |
| 173 | 610118 | Cover, Spark plug (Use as required) |
| 176 | 31992 | Spacer, Screen |
| 177 | 8345 | Washer, 1/4 plain (Use as required) |
| 178 | 27070 | Washer, Lock 1/4 E.T. (Use as require d) |
| | 650675 | Washer, Flat 1/4 (Use as required) |
| 184 | 27793 | Clip, Conduit |
| 185 | 28942 | Screw, 10-32 x 3/8" |
| 187 | 650713 | Screw, 5/16-18 x 5/8" |
| | 26073 | Washer, Flat |
| | 32953 | Screen, Starter pulley |
| 247 | 31980 | Pulley, Starter |
| | 650680 | Screw, 1/4-20 x 1-1/2" |
| | 32046 | Rope Assy., Starter (Use as required) |
| 264 | 650661 | Screw, 1/4-20 x 3/4" |
| | 610408 | Nut, Hex |
| | 610750 | Grommet, Lead wire |
| | 610748 | Solid State Magneto (Incl.151,173,265 ,266) |
| | 610746 | Solid State Flywheel |
| | 31752 | Decal, Air cleaner |
| | 34346 | Decal, Instruction |
| | 550223 | Decal, Name |
| | 32676 | Decal, Solid State |
| 300 | 32255A | Valve, Seat, Spring & Gasket Assy. |
| 301 | 631533 | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 for breakdown) |
| 304 | 33237A | * Gasket Set (Incl. items marked *) |


For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH120-120079C Page 6 of 9 Engine Parts List #2

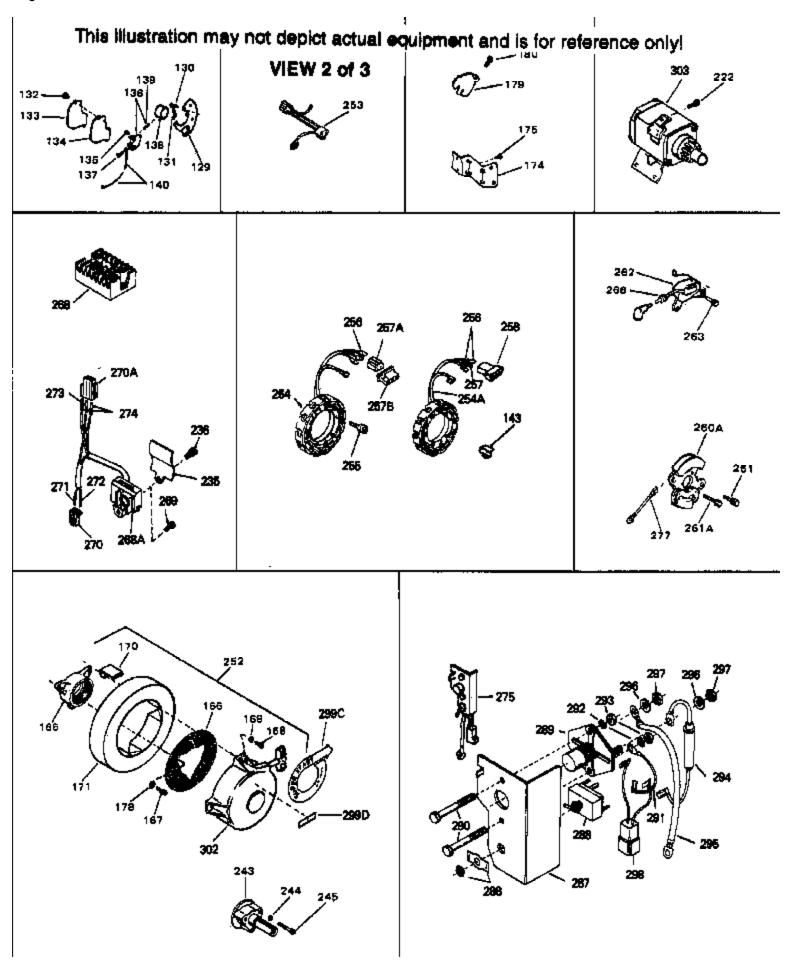

| | Part Number | Qty | Description |
|--|---|-----|---|
| 178 180 222 222 | 27070 650675 650701 792028 650781 34276 | | Washer, Lock 1/4 E.T. (Use as require d) Washer, Flat 1/4 (Use as required) Screw, 8-18 x 7/16" (Use as required) Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) Plate, Cover (Use as required to cover regulator mounting hole in blower housing) |
| 243 244 245 | 650736 32252 27513 792051 730134 | | Screw, 10-16 x 3/8" (Use as required) Shaft, Flywheel extension Lockwasher Screw, 1/4-20 x 1-3/4" Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required) |
| | 33018 610761 | | Harness Assy., Adapter (Use as requir ed) Alternator Coil (Solid State) (10 Amp) (Incl. Nos. 253, 256 & 257A) |
| 256 257B 257A 266 268 275 | 650416 610922 610824 610819 610750 610749 730198 33835 | | Screw, 10-32 x 1" Terminal, Female Flat Connector (Female terminals) (As req.) Connector, Pyramid (For female termin als) Grommet, Lead wire Solid State Regulator (10 Amp) Starter Switch Kit(Incl. 287-298) (As req.) Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown. |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HH120-120079C Page 8 of 9 Engine Parts List #3

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY DEM.

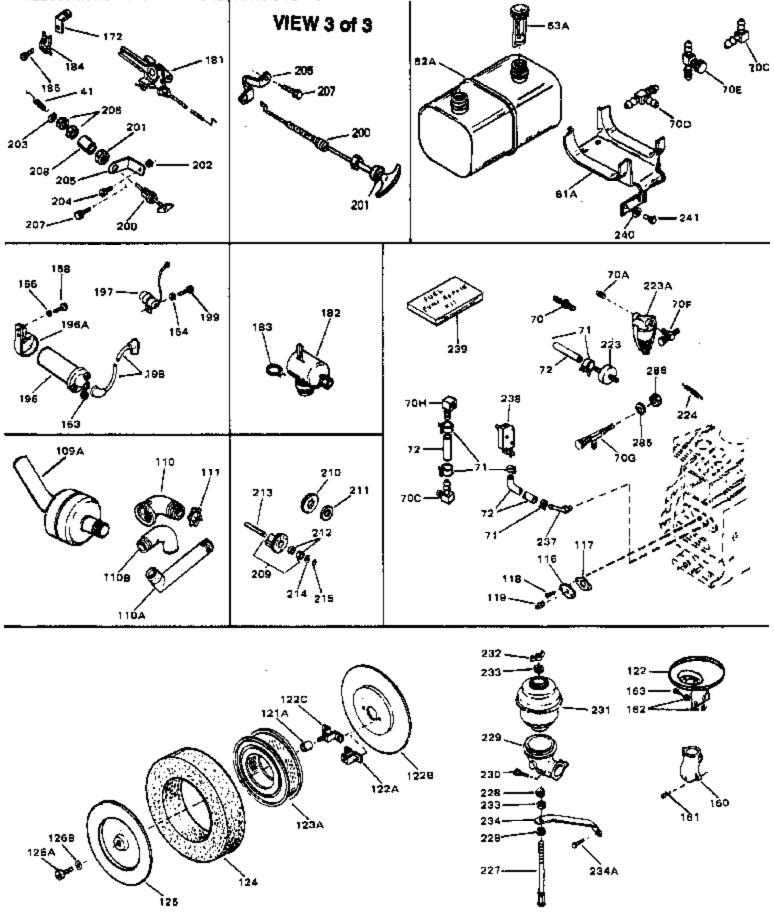

| Ref # | Part Number 0 | ty De | escription |
|-------|---------------|-------|---|
| 41 | 31967 | Sp | oring, Governor |
| 62A | 31977 | Fu | iel Tank (Incl. 63) |
| 70 | 29634 | Fitt | ting, Fuel line |
| 71 | 26460 | Cla | amp, Fuel line (Use as required) |
| 72 | 29774 | Fu | iel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | Fu | iel Line (Braided) (16") (Use as req uired) |
| 72 | 30962 | Fu | iel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | Fu | iel Line (Braided) (48") (Use as req uired) |
| 119 | 28534 | Pip | pe Plug, 1/8-27 (Use as required) |
| 119 | 9556 | Plu | ug, Pipe, 1/8-27 (Use as required) |
| 123A | 32008 | Ele | ement, Air cleaner |
| 184 | 27793 | Cli | ip, Conduit |
| 185 | 28942 | Sci | rew, 10-32 x 3/8" |