ILLUSTRATION SHOWS TYPICAL PARTS ONLY, ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY DEML



www.mymowerparts.com

| Ref # | Part Number                            | Qty De: | scription  |
|-------|--|---------|--|
|       | 33042                                  |         | linder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore)                                      |
|       | 27652                                  | •       | , Dowel  |
| 4     | 31950                                  |         | al, Oil  |
| 5     | 31940                                  | Inta    | ake Valve (Std.)   |
| 5     | 31941                                  | Inta    | ake Valve (1/32" OS) (Incl. 9)   |
|       | 31942                                  |         | haust Valve (Std.)   |
| 6     | 31943                                  | Ext     | haust Valve (1/32" OS) (Incl. 9)   |
|       | 650592                                 |         | y, Flywheel  |
|       | 31944                                  |         | ring, Valve  |
|       | 31946                                  |         | p, Lower valve spring (1/32" OS)   |
|       | 31945                                  |         | p, Lower valve spring (Std.)   |
|       | 31945                                  |         | p, Lower valve spring (Std.)   |
|       | 31946                                  |         | p, Lower valve spring (1/32" OS)   |
|       | 20810                                  |         | , Valve spring retainer  |
|       | 32978A                                 |         | ankshaft (Incl. 12, 13, 17, 78 & 79 )  |
|       | 29783                                  |         | n, Crankshaft gear   |
|       | 31931<br>22239B                        |         | ar, Crankshaft   |
|       | 32238B<br>32239B                       |         | ton & Pin Ass'y. (Std.)(Incl.16)(3 -1/2")  |
|       | 32240B                                 |         | ton & Pin Ass'y. (.010" OS) (Incl. 16)<br>ton & Pin Ass'y. (.020" OS) (Incl. 16) |
|       | 32240B<br>32621B                       |         | ton & Pin Assy. (.020 OS) (Incl. 16)<br>ton & Pin Ass'y. (.030" OS) (Incl. 16)   |
|       | 32622B                                 |         | ton & Pin Ass'y. (.030 °OS) (Incl. 16)   |
|       | 34511                                  |         | ton, Pin & Ring Set (Std.) (3-1/2" Bore)   |
|       | 34512                                  |         | ton, Pin & Ring Set (3d.) (3-1/2 Bore)   |
|       | 34513                                  |         | ton, Pin & Ring Set (.020" OS)   |
|       | 34524                                  |         | ton, Pin & Ring Set (.030" OS)   |
|       | 34525                                  |         | ton, Pin & Ring Set (.040" OS)   |
|       | 32241                                  |         | ng Set (Std.) (3-1/2" Bore)  |
|       | 32242                                  |         | ng Set (.010" OS)  |
|       | 32243                                  |         | ng Set (.020" OS)  |
|       | 32625                                  |         | ng Set (.030" OS)  |
|       | 32626                                  |         | ng Set (.040" OS)  |
| 15    | 32336                                  |         | -Ringing Set, Piston   |
|       | 31919                                  |         | ng, Piston pin retaining   |
|       | 33093A                                 |         | nnecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)                                      |
|       | 34383                                  |         | nnecting Rod Assy.(.010" US)(Incl.1 8,19,20)                                     |
|       | 34384                                  |         | nnecting Rod Assy.(.020" US)(Incl.1 8,19,20)                                     |
|       | 32077                                  |         | It, Connecting rod   |
|       | 26073                                  |         | asher, Connecting rod  |
|       | 28264                                  |         | t Assy., Lock  |
|       | 32150                                  |         | mshaft (MCR)   |
|       | 31939                                  |         | er, Valve  |
|       | 31956A                                 |         | Casket, Cylinder cover   |
|       | 32580A<br>30673                        |         | ver, Cylinder (Incl. 4, 28, 30, 34, & 43)  |
|       | 29673<br>33069                         |         | Casket, Oil fill   |
|       | 32426                                  |         | ostick (Incl. 25A)   |
|       | 650588                                 |         | acer, Governor rod<br>rew, 1/4-20 x 2"   |
|       | 31927                                  |         | Drain Plug   |
|       | 31968                                  |         | k, Governor  |
|       | 650451                                 |         | rew, 1/4-20 x 1"   |
|       | 31964                                  |         | imp, Governor lever  |
|       | 29193                                  |         | ng, Retaining  |
|       | 31963                                  |         | ver, Governor adjusting  |
|       | 650518                                 |         | ckwasher   |
|       | 650544                                 |         | rew, 10-24 x 7/8"  |
|       | 7975                                   |         | t, 10-24   |
|       | 31965                                  |         | tte, Governor spring   |
|       | www.mymo                               |         |  |
|       | ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, ,, | ,, 01   |  |

# For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 $_{\rm Page\ 3\ of\ 9}$ Engine Parts List #1

| Ref # | Part Number Qty | Description  |
|-------|-----------------|--|
|       | 30312           | Screw, 10-32 x 1/2"  |
|       | 31967           | Spring, Governor   |
|       | 30590A          | Washer, Flat   |
|       | 32425           | ·  |
|       |                 | Rod Assy., Governor  |
|       | 31948           | Spool, Governor  |
|       | 29193           | Ring, Retaining  |
|       | 31947           | Gear Assy., Governor   |
|       | 31930           | Shaft, Mechanical Governor                                     |
|       | 32246A          | * Gasket, Cylinder head  |
|       | 33034           | Head, Cylinder   |
|       | 650694A         | Screw, 5/16-18 x 2" (Use as required)                          |
| 51    | 650711          | Screw, 5/16-18 x 1-5/8" (Use as requi red)                     |
| 51    | 650628A         | Screw, 5/16-18 x 2-3/8" (Use as requi red)                     |
| 51    | 650695A         | Screw, 5/16-18 x 2-1/4" (Use as requi red)                     |
| 51    | 650714          | Screw, 5/16-18 x 1-5/8" (Use as requi red)                     |
| 51    | 650697A         | Screw, 5/16-18 x 2-1/2" (Use as required)                      |
|       | 650692          | Screw, 5/16-18 x 1-3/4" (Use as requi red)                     |
|       | 650603          | Screw, 5/16-18 x 5/8" (Use as require d)                       |
|       | 33636           | Resistor Spark Plug (RJ-8C)                                    |
|       | 34251           | Resistor Spark Plug (RJ-17LM)                                  |
|       | 33035           | Cover, Cylinder head   |
|       | 28537           | Washer, Plain  |
|       | 650691          | Washer, Flat (Use as required)                                 |
|       | 650690          |  |
|       |                 | Washer, Belleville (Use as required)                           |
|       | 8274            | Washer, Lock (Use as required)                                 |
|       | 650128          | Screw, 10-24 x 1/2"  |
|       | 31976           | Extension, Blower housing                                      |
|       | 410144B         | Fuel Cap (White Plastic)(Std.)(As req uired)                   |
| 63    | 34210           | Fuel Cap (Red Plastic) (Spurt resistant, High profile) (Use as |
|       |                 | required)  |
| 67    | 650517          | Screw, 1/4-20 x 27/32" (Use as requir ed)                      |
|       | 650561          | Screw, 1/4-20 x 5/8" (Use as required )                        |
|       | 30063           | Screw, 1/4-20 x 1/2" (Use as required )                        |
|       | 792028          | Screw, 5/16-18 x 7/8" (Use as require d)                       |
|       | 26460           | Clamp, Fuel line (Use as required)                             |
|       | 29774           | Fuel Line (Braided) (8.25") (Use as r equired)                 |
|       | 30705           | Fuel Line (Braided) (16") (Use as required)                    |
|       | 30962           | Fuel Line (Braided) (32") (Use as req uired)                   |
|       | 30965           | Fuel Line (Braided) (48") (Use as req uired)                   |
|       | 32579           | Baffle, Blower housing   |
|       | 650561          | Screw, 1/4-20 x 5/8"   |
|       | 31932           | ·  |
|       | 31928           | Bearing, Tapered roller  |
|       |                 | Cup, Bearing   |
| 00    | 32031           | Spacer, Steel (.010" thick) NOTE: Determine the gap            |
|       |                 | between the cover and the machined surface on the cylinder     |
|       |                 | which can be from .001"up to .007" in which case no shim       |
|       |                 | gaskets will be required. Use of gasket must be limited to a   |
|       |                 | combined total of .010" thick. Steel spacersmust be used       |
|       |                 | as required  |
| 81    | 31971           | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap       |
| O1    |                 | between the cover and the machined surface on the cylinder     |
|       |                 | which can be from .001"up to .007" in which case no shim       |
|       |                 | gaskets will be required. Use of gasket must be limited to a   |
|       |                 | combined total of .010" thick. Steel spacersmust be used       |
|       |                 | as req   |
|       |                 | 40 104   |
|       |                 |  |

### www.mymowerparts.com

|      |                  | Qty | Description   |
|------|------------------|-----|---|
| 82   | 31972            |     | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| 820  | 32599            |     | "O" Ring  |
|      | 32577            |     | Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat |
| 84   | 792028           |     | Screw, 5/16-18 x 7/8"   |
| 84A  | 650679           |     | Lockwasher, 5/16" (Use as required)   |
| 85   | 650666           |     | Washer, Lock  |
| 86   | 650594           |     | Nut, Flywheel, 3/4-16   |
| 87   | 33044A           |     | Blower Hsg. (Incl.73) (For electric s tarter)   |
| 91   | 8274             |     | Washer, Lock  |
|      | 650595           |     | Screw, 5/16-24 x 3/8"   |
|      | 8274             |     | Washer, Lock  |
|      | 650624           |     | Screw, 5/16-24 x 9/16"  |
|      | 31958            |     | * Gasket, Breather  |
|      | 31957            |     | Breather Assy.  |
|      | 35350            |     | Tube, Breather  |
|      | 650128           |     | Screw, 10-24 x 1/2"   |
|      | 28558            |     | Washer, Wave  |
|      | 31966            |     | Bushing, Control lever  |
|      | 31984A           |     | Lever, Control  |
|      | 650597<br>650501 |     | Screw, 10-24 x 5/8"   |
|      | 650591<br>33099  |     | Screw, 10-24 x 2"   |
|      | 32042            |     | Spring Nipple, Exhaust pipe   |
|      | 32043B           |     | Muffler   |
|      | 33038            |     | Plug, Button (Use as required)  |
|      | 29752            |     | Nut & Lockwasher Assy.  |
|      | 650587           |     | Stud, Carburetor  |
|      | 27272            |     | * Gasket, Air cleaner   |
|      | 650399           |     | Screw, 10-32 x 5/8"   |
|      | 30767            |     | Spacer, Air cleaner   |
| 122E | 32376            |     | Bracket, Air cleaner  |
| 122D | 32378            |     | Bracket, Air cleaner  |
| 125A | 32009            |     | Cover, Air cleaner  |
|      | 650513           |     | Nut, Wing   |
|      | 650713           |     | Screw, 5/16-18 x 5/8" (Use as require d)  |
|      | 650429           |     | Screw, 5/16-18 x 3/4" (Use as require d)  |
|      | 792028           |     | Screw, 5/16-18 x 7/8" (Use as require d)  |
|      | 26073            |     | Washer, Flat (Use as required)  |
| 141A |                  |     | Lockwasher, Split (Use as required)   |
|      | 31960            |     | * Gasket, Carburetor  |
|      | 31959            |     | Baffle, Air   |
|      | 33356            |     | Terminal, Ground  |
|      | 730201           |     | Trigger Pin Kit (Use as required)   |
|      | 610118           |     | Cover, Spark plug (Use as required)   |
|      | 31992<br>9345    |     | Spacer, Screen Wacher, 1/4 plain (Use as required)  |
|      | 8345             |     | Washer, 1/4 plain (Use as required)   |
| 1/8  | 27070            | *** | Washer, Lock 1/4 E.T. (Use as require d)  |

Washer, Lock 1/4 E.T. (Use as require d)
Www.mymowerparts.com

# 


| Ref # | Part Number Qty | Description   |
|-------|-----------------|---|
| 178   | 650675          | Washer, Flat 1/4 (Use as required)                              |
| 184   | 27793           | Clip, Conduit   |
| 185   | 28942           | Screw, 10-32 x 3/8"   |
| 187   | 650713          | Screw, 5/16-18 x 5/8"   |
| 188   | 26073           | Washer, Flat  |
| 246   | 33776           | Screen, Starter pulley  |
| 247   | 31980           | Pulley, Starter   |
| 248   | 650680          | Screw, 1/4-20 x 1-1/2"  |
| 249   | 32046           | Rope Assy., Starter (Use as required)                           |
| 264   | 650661          | Screw, 1/4-20 x 3/4"  |
| 265   | 610408          | Nut, Hex  |
| 266   | 610750          | Grommet, Lead wire  |
| 267   | 610748          | Solid State Magneto (Incl.151,173,265,266)                      |
| 278   | 610746          | Solid State Flywheel  |
| 299B  | 550223          | Decal, Name   |
| 299B  | 32676           | Decal, Solid State  |
| 299   | 34346           | Decal, Instruction  |
| 299A  | 31752           | Decal, Air cleaner  |
| 300   | 32411A          | Valve, Seat, Spring & Gasket Assy.                              |
| 301   | 631498          | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 94 |
|       |                 | for breakdown)  |
| 304   | 33237A          | * Gasket Set (Incl. items marked *)                             |



www.mymowerparts.com

### 

| Ref # | Part Number | Qty Description  |
|-------|-------------|--|
| 178   | 27070       | Washer, Lock 1/4 E.T. (Use as require d)   |
|       | 650675      | Washer, Flat 1/4 (Use as required)   |
| 180   | 650701      | Screw, 8-18 x 7/16" (Use as required)  |
|       | 792028      | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)   |
|       | 650781      | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)   |
| 235   | 34276       | Plate, Cover (Use as required to cover regulator mounting hole in blower housing)  |
| 236   | 650736      | Screw, 10-16 x 3/8" (Use as required)  |
| 252   | 730134      | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required)   |
| 253   | 33018       | Harness Assy., Adapter (Use as requir ed)  |
| 254   | 610761      | Alternator Coil (Solid State) (10 Amp) (Incl. Nos. 253, 256 & 257A)  |
| 255   | 650416      | Screw, 10-32 x 1"  |
| 256   | 610922      | Terminal, Female   |
| 257B  | 610824      | Flat Connector (Female terminals) (As req.)  |
|       | 610819      | Connector, Pyramid (For female termin als)   |
|       | 610750      | Grommet, Lead wire   |
|       | 610749      | Solid State Regulator (10 Amp)   |
|       | 730198      | Starter Switch Kit(Incl. 287-298) (As req.)  |
| 303   | 33835       | Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown. |

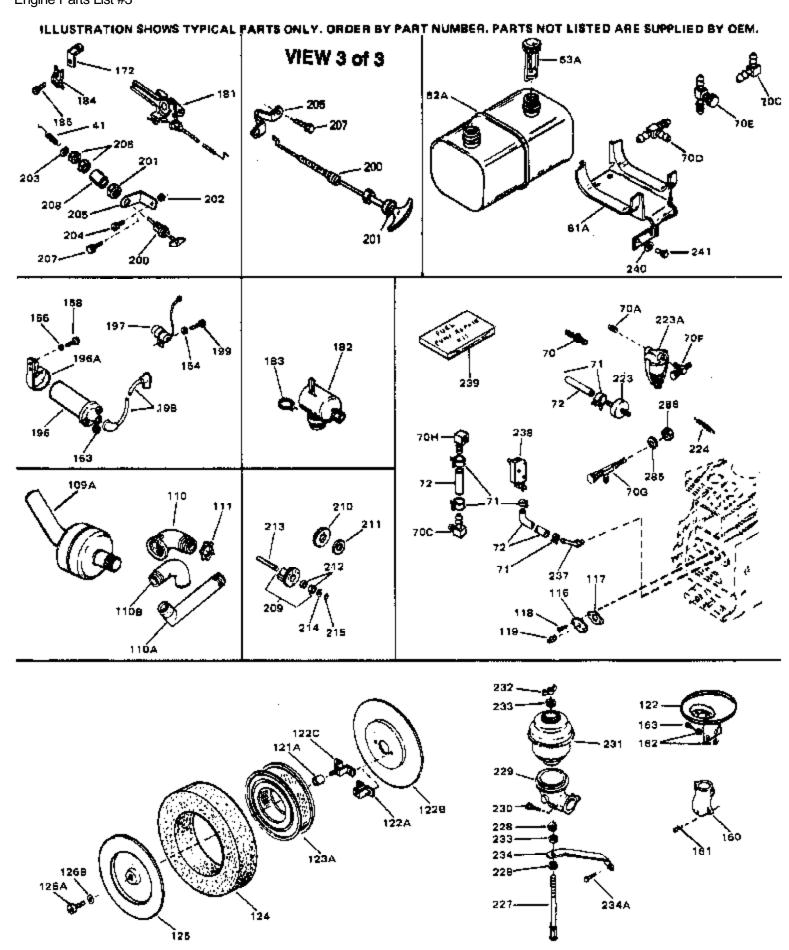

www.mymowerparts.com

# 

| Ref # | Part Number C | ty Description                                 |
|-------|---------------|--|
|       | 31967         | Spring, Governor                               |
| 70    | 29634         | Fitting, Fuel line                             |
| 71    | 26460         | Clamp, Fuel line (Use as required)             |
| 72    | 29774         | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72    | 30705         | Fuel Line (Braided) (16") (Use as req uired)   |
| 72    | 30962         | Fuel Line (Braided) (32") (Use as req uired)   |
|       | 30965         | Fuel Line (Braided) (48") (Use as req uired)   |
| 119   | 28534         | Pipe Plug, 1/8-27 (Use as required)            |
|       | 9556          | Plug, Pipe, 1/8-27 (Use as required)           |
| 123A  | 32008         | Element, Air cleaner                           |
|       | 31990         | Bracket, Choke control                         |
| _     | 27793         | Clip, Conduit                                  |
| 185   | 28942         | Screw, 10-32 x 3/8"                            |