For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983

HM80-155231F Page 1 of 11

Engine Parts List #1

ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER, PARTS NOT LISTED ARE SUPPLIED BY OEM. 407 305 292 173A 379 330 370E 329 338 337 400

www.mymowerparts.com


| Pof # | Part Number Qty | Description |
|-------|------------------|---|
| | 34348B | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| | 27652 | Pin, Dowel |
| | 30700 | Yoke, Governor |
| | 650494 | Screw, 6-40 x 5/16" |
| | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | 650548 | Screw, 8-32 x 5/16" |
| | 34663 | Spring, Speed control |
| | 32630 | Seal, Oil |
| | 35256A | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 35198 | Crankshaft (Incl. 108 & 109) |
| | 29826 | Screw, 10-32 x 3/4" |
| 36 | 29918 | Lockwasher, #8 E.T. |
| 37 | 29216 | Nut & Lockwasher, 10-32 "Keps" |
| 37A | 30322 | Locknut, Hex "Keps", 8-32 |
| 38 | 29642 | Ring, Retaining |
| 40 | 34552 | Piston, Pin & Ring Set (Std.) (3-1/8") |
| 40 | 34553 | Piston, Pin & Ring Set (.010" OS) |
| 40 | 34554 | Piston, Pin & Ring Set (.020" OS) |
| 41 | 34329A | Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
| | 34330A | Piston & Pin Ass'y. (.010" OS)(Incl. 43) |
| | 34331A | Piston & Pin Ass'y. (.020" OS)(Incl. 43) |
| | 34332 | Ring Set (Std.) (3-1/8" Bore) |
| | 34333 | Ring Set (.010" OS) |
| | 34334 | Ring Set (.020" OS) |
| | 27888 | Ring, Piston pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 49) |
| | 650662C | Bolt, Connecting rod (2 pieces) |
| | 34034 | Lifter, Valve |
| | 34242 | Dipper, Oil |
| | 34143 | Camshaft (MCR) |
| | 33273A 650128 | Extension, Blower housing |
| | 35262 | Screw, 10-24 x 1/2" * Gasket, Cylinder cover |
| | 33367B | Cylinder Cover (Incl. 71, 75, 80, 311 & 312) |
| | 33368 | Bushing, Crankshaft |
| | 27642 | Plug, Oil drain |
| | 31950 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| 86 | 650833 | Screw, 1/4-20 x 1-3/16" |
| 87 | 650832 | Screw, 1/4-20 x 1-11/16" |
| 89 | 32589 | Key, Flywheel |
| 92 | 650815 | Washer, Belleville |
| 93 | 8116 | Nut, Hex (1/2-20) |
| 101 | 610118 | Cover, Spark plug (Use as required) |
| 103 | 650489 | Screw, 1/4-20 x 5/8" |
| | 29783 | Pin, Crankshaft gear |
| | 33245 | Gear, Crankshaft |
| | 34240 | Ground Wire |
| | 34041A | * Gasket, Head |
| | 34030A | Head, Cylinder |
| 125 | 27878A | Exhaust Valve (Std.) (Incl. 151) |
| | www.mymowo | erparts.com |
| | 7 | |

| | | Qty | Description |
|-------|-----------------|-----|--|
| | 27880A | | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | | Intake Valve (Std.) (Incl. 151) |
| 126 | 34036 | | Intake Valve (1/32" OS) (Incl. 151) |
| 127 | 650691 | | Washer (Use as req., but not w/6021A screw) |
| 127A | 26073 | | Washer, Flat (Use as required) |
| 127A | 650570 | | Washer, Flat (Use as required) |
| | 650690 | | Washer, Belleville |
| | 650727 | | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| 100/1 | 552.77 | | 650691 washer) |
| 131 | 650802 | | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650713 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 792028 | | Screw, 5/16-18 x 7/8" (Use as require d) |
| | 33636 | | Resistor Spark Plug (RJ17LM) |
| | 33369 | | Bracket, Governor gear |
| | 650836 | | Screw, 10-24 x 1/2" |
| | 27882 | | Cap, Upper valve spring |
| | 35862 | | • • • • |
| | | | Seal Assy., Intake valve |
| | 27881 | | Spring, Valve |
| | 32581 | | Cap, Lower valve spring |
| | 27896A | | * Gasket, Breather cover |
| | 28423 | | Body, Breather |
| | 28424 | | Element, Breather |
| | 28425 | | Cover, Valve spring |
| | 32446 | | Grommet, Breather tube |
| | 34696 | | Tube, Breather |
| | 650128 | | Screw, 10-24 x 1/2" |
| 174 | 650597 | | Screw, 10-24 x 5/8" |
| 178 | 29752 | | Nut & Lockwasher, 1/4-28 |
| 179B | 30593 | | Clip, Primer line (Use as required) |
| 182 | 30088A | | Screw, 1/4-28 x 1" |
| 184 | 33263 | | * Gasket, Carburetor |
| 185 | 34707 | | Pipe, Intake |
| 203 | 31342 | | Spring, Compression |
| | 650549 | | Screw, 5-40 x 7/16" |
| | 610973 | | Terminal Assy. (Use as required) |
| | 27793 | | Clip, Conduit |
| | 28942 | | Screw, 10-32 x 3/8" |
| | 650378 | | Screw, Torx T-30, 5/16-18 x 1-1/8 " |
| | 27915A | | * Gasket, Intake pipe |
| | 34833B | | Blower Housing (For electric starter) |
| | 650788 | | Screw, 5/16-18 x 3/4" (Use as require d) |
| | 29747B | | Screw, 5/16-24 x 21/32" |
| | | | |
| | 33272B | | Cover, Cylinder head Muffler (Optional quiet muffler) |
| | 35824 650606 | | Muffler (Optional quiet muffler) |
| | 650696 | | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 33013 | | Cover, Starter bubble |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 33662 | | Hub & Screen Assy., Starter |
| | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 29774 | | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | 30705 | | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| 290 | 30962 | | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| 292 | 26460 | | Clamp, Fuel line (Use as required) |
| | | | / |

| Ref # | Part Number | Qty Description |
|--|---|--|
| | 650665 34156A | Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 34210. Tanks with the 1-1/2" I.D. opening use fuel cap 35355. |
| | 410144B 33032 | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 305 306 310 325 325 340 341 342 370 370J 379 | 35355 33893A 33590 34011A 29443 34246 34154 34155 650561 34346 34870 631725 632176A | Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page 200 for breakdown or Fiche18A-1, Grid F-7) |
| 390 | 590479 | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5) |
| | 33279G 35570 | Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter) |
| 421 | 730225 730226 730572 | SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155231F Engine Parts List #1

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

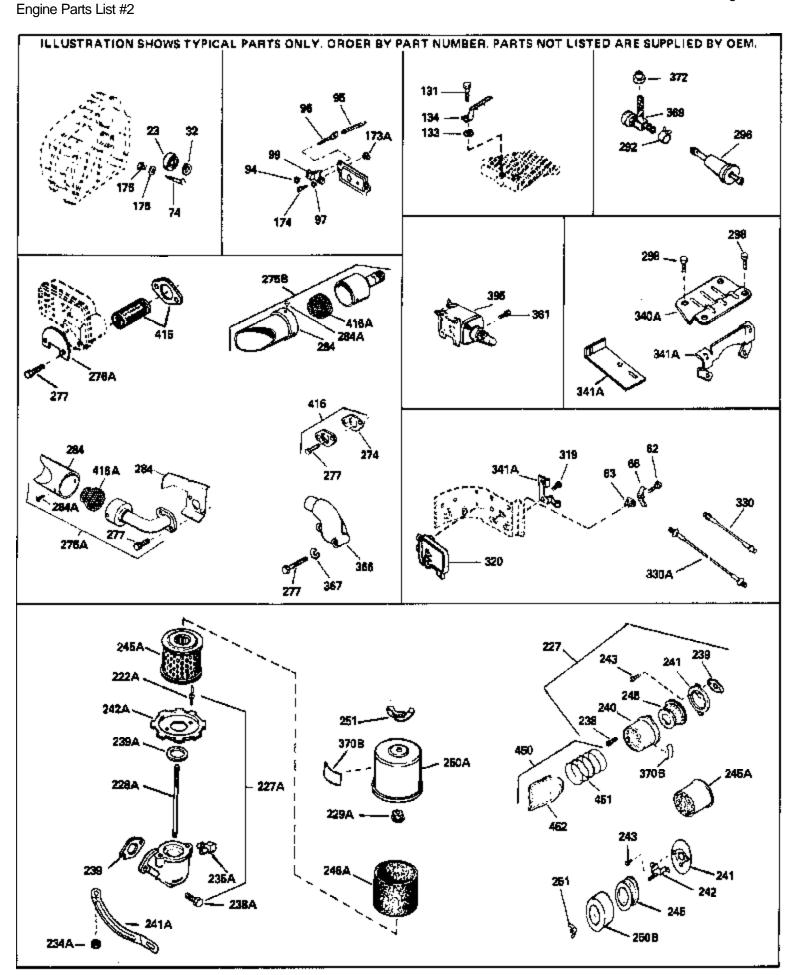

www.mymowerparts.com


| Ref # | Part Number | Description | |
|---|--|---|--|
| 97 131 131 131 173A 174 174 222A | 31855 650802 650737 650738 32446 650128 650597 | Retainer, Bearing Lockwasher, Heavy split, #10 (Buy Screw, 1/4-20 x 5/8" (Use as requi Screw, 1/4-20 x 1/2" (Use as requi Screw, 1/4-20 x 5/8" (Use as requi Grommet, Breather tube Screw, 10-24 x 1/2" Screw, 10-24 x 5/8" Pop Rivet (1/8" dia.) (Can be boug Air Cleaner Ass'y. (Incl.238,239,240 (Use as required) | red) red) red) red) ht locally) |
| 227 | 730164 | Air Cleaner Ass'y. (Incl. 238, 239, 2 as required) | 240, 241, 243 & 245) (Use |
| 228A | 35044 650824 650851 | Air Cl.Elbow (Incl.222A,228A,235A Stud, 1/4-20 x 7.33 (Use as required stud, 1/4-20 x 8.1 (Use as required elbow) | ed) |
| 235A 238A 239A 242A 245A 246A 250A 274 | 650825 30675 650163 34698A 34699 34700 34703 34702 35865 391026 | Nut & Lockwasher, 1/4-20 Fitting, Breather Screw, 10-32 x 7/8" * Gasket, Air cleaner bracket Bracket, Air cleaner Element, Air cleaner Filter, Pre-air Cover, Air cleaner Gasket, Exhaust (Use as required) Muffler (Incl. 284, 284A & 416A) (T can be used on any model.) | |
| 277A 292 298 370J | 35824 650696 26460 650665 34870 34387 | Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 2 Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Decal, Instruction Can be used on Decal, Instruction Can be used on recoil starter. | HM80 with diecast starter. |
| | 34704 33329D | Decal, Air cleaner Starter Motor Kit (110-120 Volt) Thi motor kit may have been added to added only if cylinder hasdrilled and bosses and a ring gear flywheel. R stamped on end cap of motor, or o Ref | this engine. It can be d tapped starter mounting defer to service number |
| 408 | 35570 | Screen Seal (Can be used on HM8 recoil starter) | 30 with stamped steel |
| 409 | 35569 | Spacer (Can be used on HM80 wit starter) | h stamped steel recoil |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, used on HM80 with stamped steel | |
| 411 | 35568 | Debris Screen (Can be used on HN recoil starter) | M80 with stamped steel |
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be us stamped steel recoil starter) | ed on HM80 with |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155231F Engine Parts List #2

| Ref # | Part Number | Qty | Description |
|-------|------------------|-----|---|
| | 730130 730572 | • | Exh.Adapter Kit (Incl.274,277)(Use as req.) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983

HM80-155231F Page 9 of 11 Engine Parts List #3

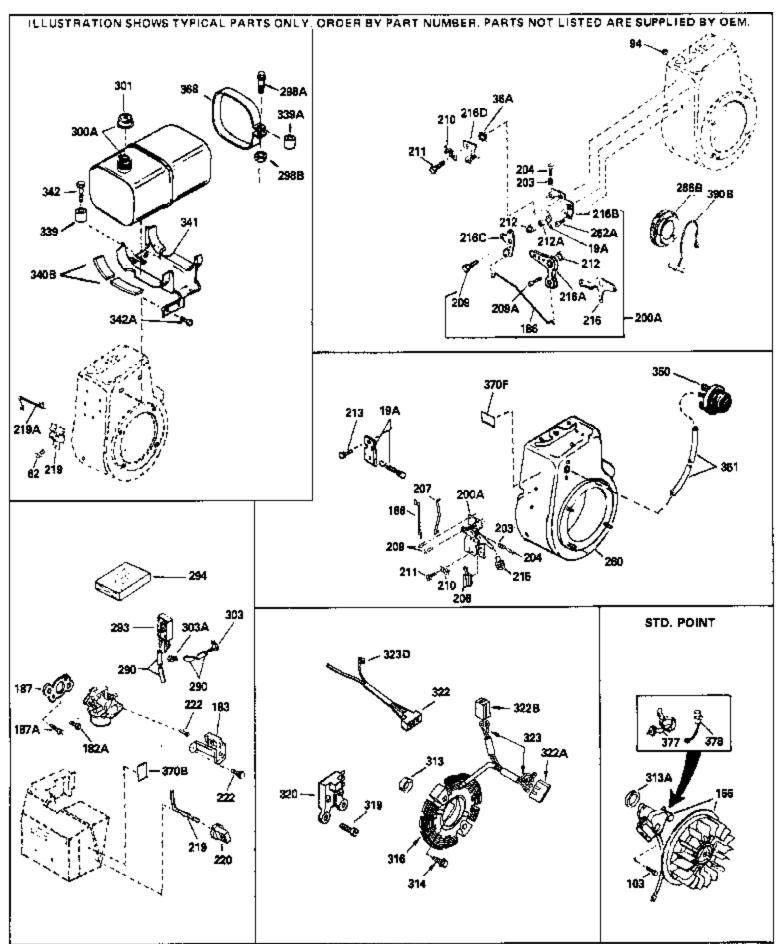

www.mymowerparts.com

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155231F Engine Parts List #3

| Def # | Dout Ni wala au | Description |
|--|--|---|
| | | y Description |
| | 650489 610848 | Screw, 1/4-20 x 5/8" Magneto (w/ring gear for 110 volt sta rter) NOTE: The complete magneto is not available as an assembly. The magneto number is shown for reference purposes only. Order component parts individually, as shown in parts list. (Refer to Division 5, Section B, page 28 for breakdown or Fiche 18A-1, Grid G |
| 200A 203 204 206 207 209 210 211 260 275C 277A 286B 290 290 290 293 294 301 | 34667 34664 31342 650549 610973 33878 650821 27793 28942 34833B 35824 650696 33662 29774 30705 30962 35800 33010 410144B 33032 | Link, Governor Control Bracket (Incl.19,203,204,206, 209) Spring, Compression Screw, 5-40 x 7/16" Terminal Assy. (Use as required) Link, Governor-to-throttle Screw, 10-32 x 1/2" Clip, Conduit Screw, 10-32 x 3/8" Blower Housing (For electric starter) Muffler (Optional quiet muffler) Screw, 5/16-18x2-3/4" (Used with 276A) Hub & Screen Assy., Starter Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Fuel pump, Impulse Repair Kit, Fuel pump Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 303 313A 339 341 342 370J | 35355 33713 33876 35038 34155 650561 34870 34387 | Fuel Cap (Red plastic) (1-1/2" I.D.) Fitting, Elbow Gasket, Stator Spacer, Tank Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Decal, Instruction Can be used on HM80 with diecast starter. Decal, Instruction Can be used on HM80 with stamped steel recoil starter. |
| 377 378 | 34704 30547A 30548B 35570 | Decal, Air cleaner Contact Assy., Breaker Condenser Screen Seal (Can be used on HM80 with stamped steel recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 Page 11 of 11

HM80-155231F Engine Parts List #3

Ref # Part Number Qty Description 425 730572 Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) 429 650868 Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). 430 611077 Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). 431 590609 Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) Centering tube (Use as required) (Refer to Mechanics 431 590610 Handbook for installation instructions). 432 611078 A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). 432 611079 D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). 433 590611 Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). 433 590636 Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions).