
For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155254J Page 1 of 11

Engine Parts List #1

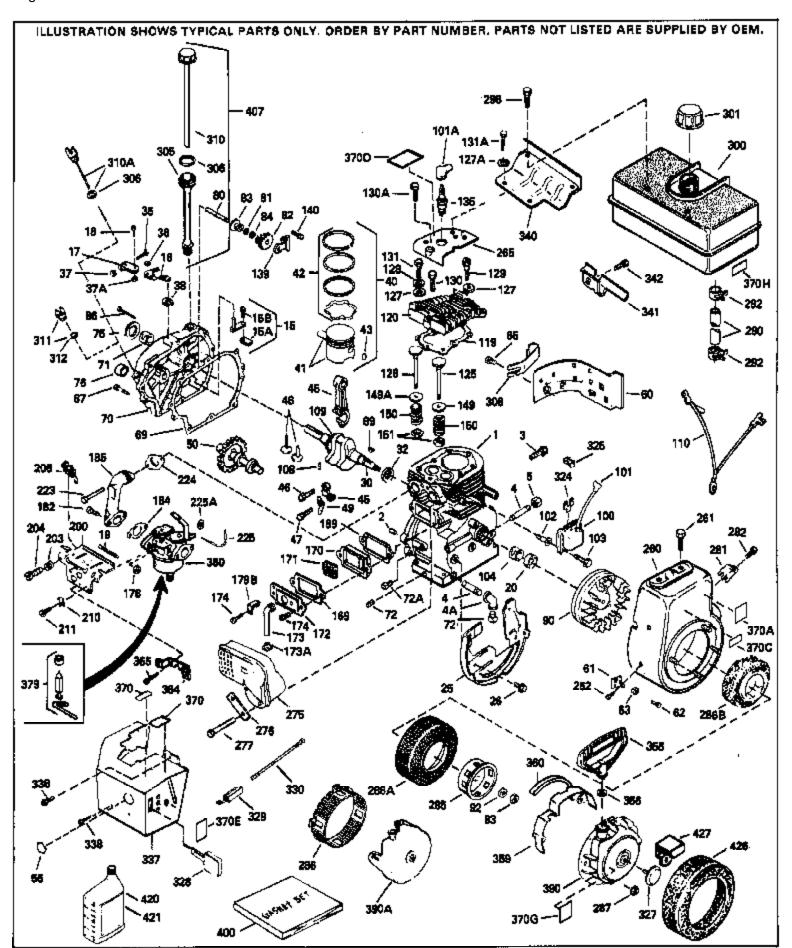

www.mymowerparts.com

| | | Description |
|-----|---------|--|
| | 34348B | Cylinder (Incl.2,20,72,72A) (3-1/8" B ore) |
| | 27652 | Pin, Dowel |
| | 650820 | Screw, 1/4-20 x 1/2" |
| | 30968 | Nipple, Pipe |
| | 30969 | Cap, Oil drain |
| | 650494 | Screw, 6-40 x 5/16" |
| | 30699C | Rod Assy., Governor (Incl. 15A & 15B) |
| | 30700 | Yoke, Governor |
| | 33454 | Governor Lever Assy. |
| | 29916 | Clamp, Governor lever |
| | 650548 | Screw, 8-32 x 5/16" |
| | 34663 | Spring, Speed control |
| | 32630 | Seal, Oil |
| | 35256A | Baffle, Blower housing |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 33459A | Crankshaft (Incl. 108 & 109) |
| | 29826 | Screw, 10-32 x 3/4" |
| | 29918 | Lockwasher, #8 E.T. |
| | 29216 | Nut & Lockwasher, 10-32 "Keps" |
| | 30322 | Locknut, Hex "Keps", 8-32 |
| | 29642 | Ring, Retaining |
| | 34552 | Piston, Pin & Ring Set (Std.) (3-1/8") |
| | 34553 | Piston, Pin & Ring Set (.010" OS) |
| | 34554 | Piston, Pin & Ring Set (.020" OS) |
| | 34329A | Piston & Pin Ass'y.(Std)(Incl.43)(3-1 /8") |
| | 34330A | Piston & Pin Ass'y. (.010" OS)(Incl. 43) |
| | 34331A | Piston & Pin Ass'y. (.020" OS)(Incl. 43) |
| | 34332 | Ring Set (Std.) (3-1/8" Bore) |
| | 34333 | Ring Set (.010" OS) |
| | 34334 | Ring Set (.020" OS) |
| | 27888 | Ring, Piston pin retaining |
| | 32591C | Rod Assy., Connecting (Incl. 49) |
| | 650662C | Bolt, Connecting rod (2 pieces) |
| | 34034 | Lifter, Valve |
| | 34242 | Dipper, Oil |
| | 34786 | Camshaft (MCR) (Extended) |
| | 33273A | Extension, Blower housing |
| | 34126 | Bracket, Grommet mounting |
| | 650760 | Screw, 8-32 x 3/8" |
| | 28545 | Grommet, Plastic |
| | 650128 | Screw, 10-24 x 1/2" |
| | 35262 | * Gasket, Cylinder cover |
| | 34787 | Cover, Cylinder (Incl. 71, 75 & 80) |
| | 33368 | Bushing, Crankshaft |
| | 27642 | Plug, Oil drain |
| | 31950 | Seal, Oil |
| | 28926 | Seal, Oil |
| | 31845 | Shaft, Mechanical governor |
| | 30590A | Washer, Flat |
| | 30591 | Gear Assy., Governor (Incl. 81) |
| | 30588A | Spool, Governor |
| | 29193 | Ring, Retaining |
| | 650833 | Screw, 1/4-20 x 1-3/16" |
| | 650832 | Screw, 1/4-20 x 1-11/16" |
| | 32589 | Key, Flywheel |
| | 650815 | Washer, Belleville |
| | 8116 | Nut, Hex (1/2-20) |
| 101 | 610118 | Cover, Spark plug (Use as required) |


Cover, Spark plug (Use as required) WWW.mymowerparts.com

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|--|
| 103 | 650489 | - | Screw, 1/4-20 x 5/8" |
| 108 | 29783 | | Pin, Crankshaft gear |
| 109 | 33245 | | Gear, Crankshaft |
| 110 | 34240 | | Ground Wire |
| | 34041A | | * Gasket, Head |
| | 34030A | | Head, Cylinder |
| | 27878A | | Exhaust Valve (Std.) (Incl. 151) |
| | 27880A | | Exhaust Valve (1/32" OS) (Incl. 151) |
| | 34035 | | Intake Valve (Std.) (Incl. 151) |
| | 34036 | | Intake Valve (1/32" OS) (Incl. 151) |
| | 26073 | | Washer, Flat (Use as required) |
| | 650570 | | Washer, Flat (Use as required) |
| | 650691 | | Washer (Use as req., but not w/6021A screw) |
| | 650690 | | Washer, Belleville |
| | 650727 | | Screw, 5/16-18 x 1-3/4" (Use as requi red) |
| | 6021A | | Screw, 5/16-18 x 1-1/2" (Use as required, but do notuse with |
| 100/1 | 002171 | | 650691 washer) |
| | | | , |
| | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| 131A | 650713 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 792028 | | Screw, 5/16-18 x 7/8" (Use as require d) |
| 131 | 650802 | | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 131 | 650738 | | Screw, 1/4-20 x 5/8" (Use as required) |
| 135 | 33636 | | Resistor Spark Plug (RJ17LM) |
| 139 | 33369 | | Bracket, Governor gear |
| 140 | 650836 | | Screw, 10-24 x 1/2" |
| 149A | 35862 | | Seal Assy., Intake valve |
| 149 | 27882 | | Cap, Upper valve spring |
| 150 | 27881 | | Spring, Valve |
| 151 | 32581 | | Cap, Lower valve spring |
| 169 | 27896A | | * Gasket, Breather cover |
| 170 | 28423 | | Body, Breather |
| 171 | 28424 | | Element, Breather |
| 172 | 28425 | | Cover, Valve spring |
| 173 | 35350 | | Tube, Breather |
| 174 | 650128 | | Screw, 10-24 x 1/2" |
| 174 | 650597 | | Screw, 10-24 x 5/8" |
| 178 | 29752 | | Nut & Lockwasher, 1/4-28 |
| | 30593 | | Clip, Primer line (Use as required) |
| | 30088A | | Screw, 1/4-28 x 1" |
| | 33263 | | * Gasket, Carburetor |
| | 33877 | | Pipe, Intake |
| | 31342 | | Spring, Compression |
| | 650549 | | Screw, 5-40 x 7/16" |
| | 610973 | | Terminal Assy. (Use as required) |
| | 27793 | | Clip, Conduit |
| | 28942 | | Screw, 10-32 x 3/8" |
| | 650378 | | Screw, Torx T-30, 5/16-18 x 1-1/8 " |
| | 27915A | | * Gasket, Intake pipe |
| | 35447A | | Blower Housing (For electric starter) |
| | 650788 | | Screw, 5/16-18 x 3/4" (Use as require d) |
| | 29747B | | Screw, 5/16-24 x 21/32" |
| | 33272B | | Cover, Cylinder head |
| | 35824 | | Muffler (Optional quiet muffler) |
| | 35056 | | Muffler |
| | 31588 | | Plate, Muffler locking |
| | 651002 | | Screw, 5/16-18 x 4-3/16" |
| 211 | 001002 | | OULDW, OF ID A TOFID |

| 277A 281 282 286B 287 290 290 290 292 | Part Number 650696 33013 650760 33662 29752 29774 30705 30962 26460 650665 34156A | Qty | Description Screw, 5/16-18x2-3/4" (Used with 276A) Cover, Starter bubble Screw, 8-32 x 3/8" Hub & Screen Assy., Starter Nut & Lockwasher, 1/4-28 Fuel Line (Braided 8-1/4")(21 cm)(As req.) Fuel Line (Braided 16")(41 cm)(Use as req.) Fuel Line (Braided 32")(81 cm)(Use as req.) Clamp, Fuel line (Use as required) Screw, 1/4-15 x 7/8" Fuel Tank (Incl. 292 & 301) NOTE: These tanks were builtwith different size fuel inlet openings. Tanks with the 1-3/16" I.D. opening use fuel cap 35355. |
|---|--|-----|--|
| | 410144B 33032 | | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" I.D.) |
| 301 | 34210 | | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) (1-3/16" I.D) |
| 305 306 310 325 325 336 337 338 340 341 342 359 360 364 365 370C 370D 370B 370A 370A | 35355 33893A 33590 34011A 29443 34246 650765 35057A 28942 34154 34155 650561 34141 32576 33377 650767 34417 34589 34416 34686 34870 631021 632334A | | Fuel Cap (Red plastic) (1-1/2" I.D.) Tube, Oil fill "O" Ring Dipstick (Incl. 306) Clip, Fuel line (Use as required) Clip, Ground wire (Use as required) Screw, 10-32 x 1/2" Cover, Carburetor Screw, 10-32 x 3/8" Plate, Fuel tank mounting Bracket, Fuel tank mounting Screw, 1/4-20 x 5/8" Guard, Starter Seal, Snow guard Bracket, Carburetor cover mounting Screw, 8-32 x 27/64" Decal, Primer Decal, Warning Decal, Choke Decal, Instruction Decal, Instruction Decal, Instruction Can be used on HM80 with diecast starter. Inlet Needle, Seat & Clip Assy. Carburetor (Incl. 184) (Refer to Division 5, Section A, page |
| 390 | 590479 | | Rewind Starter (Refer to Division 5, Section C, page 30 for breakdown or Fiche 18A-1, Grid G-5) |
| | 33279G 35570 | | Gasket Set (Incl. items marked*) Screen Seal (Can be used on HM80 with stamped steel recoil starter) |
| 409 | 35569 | | Spacer (Can be used on HM80 with stamped steel recoil starter) |
| 410 | 730573 | | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be used on HM80 with stamped steel recoil starter) |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155254J Page 5 of 11 Engine Parts List #1

| Ref # | Part Number C | Qty Description |
|-------|----------------------------|---|
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel recoil starter) |
| 413 | 650907 | Screw, $5/16-18 \times 1-5/8$ " (Can be used on HM80 with stamped steel recoil starter) |
| 421 | 730225 730226 730572 | SAE 30, 4-Cycle Engine Oil (Quart) SAE 5W30, 4-Cycle Engine Oil (Quart) Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

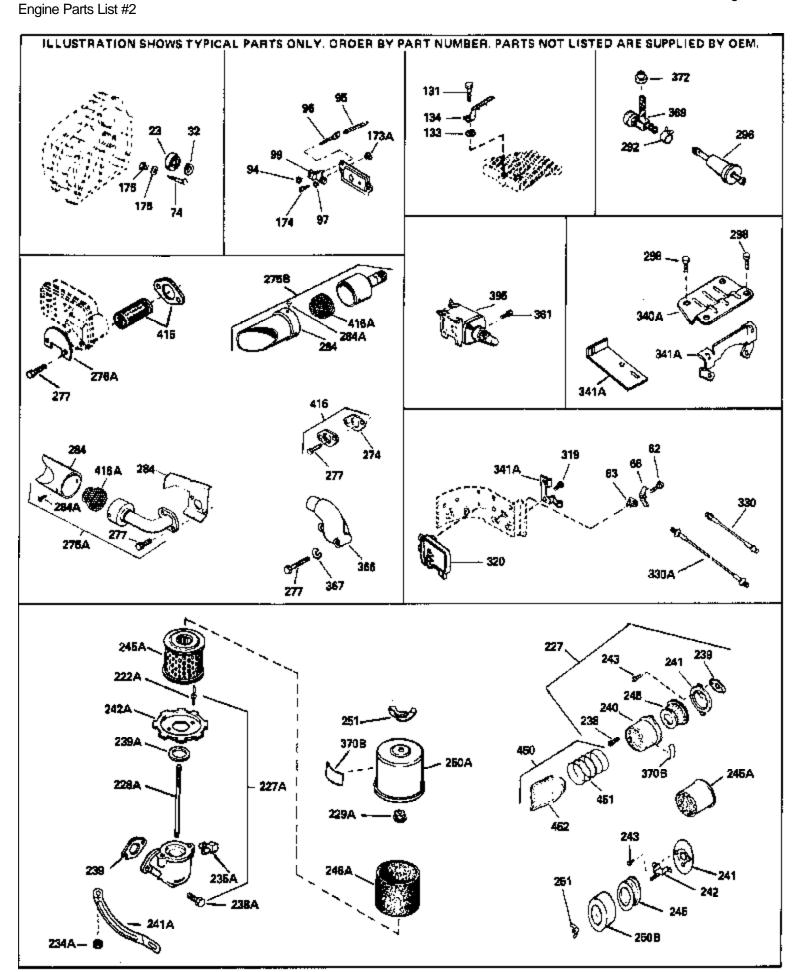

www.mymowerparts.com

| - | | | |
|-------------|--------|-----|--|
| | | Qty | |
| | 650760 | | Screw, 8-32 x 3/8" |
| | 28545 | | Grommet, Plastic |
| 74 | 31855 | | Retainer, Bearing |
| 97 | | | Lockwasher, Heavy split, #10 (Buy loc ally) |
| 131 | 650802 | | Screw, 1/4-20 x 5/8" (Use as required) |
| 131 | 650737 | | Screw, 1/4-20 x 1/2" (Use as required) |
| | 650738 | | Screw, 1/4-20 x 5/8" (Use as required) |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 650597 | | Screw, 10-24 x 5/8" |
| | 730127 | | Air Cleaner Ass'y. (Incl.238,239,240,241,243,245 & 370) |
| | 100121 | | (Use as required) |
| 227 | 730164 | | Air Cleaner Ass'y. (Incl. 238, 239, 240, 241, 243 & 245) (Use |
| | | | as required) |
| 228A | 650824 | | Stud, 1/4-20 x 7.33 (Use as required) |
| | 650851 | | Stud, 1/4-20 x 8.1 (Use as required) (Used with drilled thru |
| | | | elbow) |
| | 34700 | | Element, Air cleaner |
| 274 | 35865 | | Gasket, Exhaust (Use as required) |
| 275B | 391026 | | Muffler (Incl. 284, 284A & 416A) (This spark arresting muffler |
| | | | can be used on any model.) |
| 275C | 35824 | | Muffler (Optional quiet muffler) |
| 277 | 651002 | | Screw, 5/16-18 x 4-3/16" |
| 277A | 650696 | | Screw, 5/16-18x2-3/4" (Used with 276A) |
| 292 | 26460 | | Clamp, Fuel line (Use as required) |
| 298 | 650665 | | Screw, 1/4-15 x 7/8" |
| 369 | 35857 | | Valve, Fuel shut-off |
| | 34870 | | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 34387 | | Decal, Instruction Can be used on HM80 with stamped steel |
| 0.02 | | | recoil starter. |
| 395 | 33329D | | Starter Motor Kit (110-120 Volt) This 110-120 volt starter |
| | | | motor kit may have been added to this engine. It can be |
| | | | added only if cylinder hasdrilled and tapped starter mounting |
| | | | bosses and a ring gear flywheel. Refer to service number |
| | | | stamped on end cap of motor, or on decal for identification. |
| | | | Ref |
| 408 | 35570 | | Screen Seal (Can be used on HM80 with stamped steel |
| .00 | | | recoil starter) |
| 409 | 35569 | | Spacer (Can be used on HM80 with stamped steel recoil |
| | | | starter) |
| 410 | 730573 | | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| - | | | used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | | Debris Screen (Can be used on HM80 with stamped steel |
| | | | recoil starter) |
| ∆ 13 | 650907 | | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with |
| 410 | 300007 | | stamped steel recoil starter) |
| 415 | 730130 | | Exh.Adapter Kit (Incl.274,277)(Use as req.) |
| | 730572 | | Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on |
| 720 | 100012 | | HM80 with die cast starter) |
| | | | , |
| 429 | 650868 | | Screw, 8-18 x 1-1/8" (3 Required) (Use as required) (Refer to |
| | | | Mechanics Handbook for installation instructions). |
| | | | |


For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155254J Page 8 of 11 Engine Parts List #2

| | Part Number | Qty | |
|-----|-------------|-----|---|
| 430 | 611077 | | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983

HM80-155254J

Engine Parts List #3

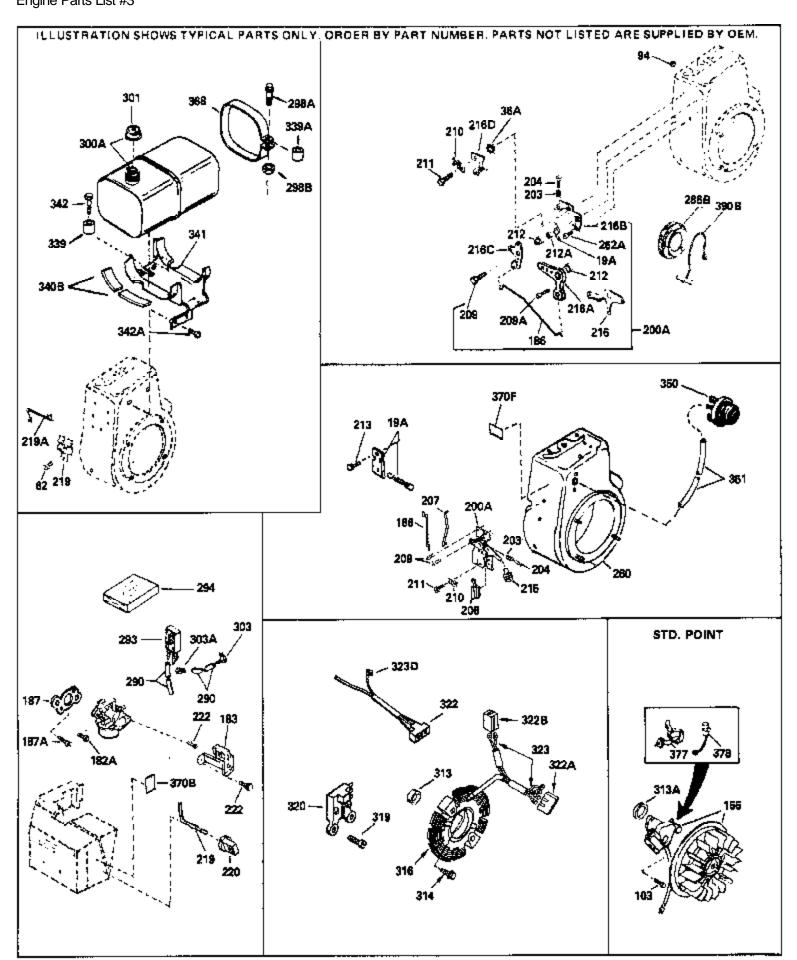

www.mymowerparts.com

| | D. A. L. | |
|-----------------|----------|---|
| | | Qty Description |
| | 650760 | Screw, 8-32 x 3/8" |
| | 650489 | Screw, 1/4-20 x 5/8" |
| 156 | 610848 | Magneto (w/ring gear for 110 volt sta rter) NOTE: The |
| | | complete magneto is not available as an assembly. The |
| | | magneto number is shown for reference purposes only. Order |
| | | component parts individually, as shown in parts list. (Refer to |
| | | Division 5, Section B, page 28 for breakdown or Fiche 18A-1, |
| | | Grid G |
| | | Olid O |
| 183 | 34587 | Bracket, Choke |
| 186 | 34667 | Link, Governor |
| 200A | 34664 | Control Bracket (Incl.19,203,204,206, 209) |
| 203 | 31342 | Spring, Compression |
| 204 | 650549 | Screw, 5-40 x 7/16" |
| 206 | 610973 | Terminal Assy. (Use as required) |
| | 33878 | Link, Governor-to-throttle |
| | 650821 | Screw, 10-32 x 1/2" |
| | 27793 | Clip, Conduit |
| | 28942 | Screw, 10-32 x 3/8" |
| | 34586 | Rod, Choke |
| | 35438 | Knob, Control |
| | | • |
| | 28820 | Screw, 10-32 x 1/2" |
| | 35447A | Blower Housing (For electric starter) |
| | 35824 | Muffler (Optional quiet muffler) |
| | 650696 | Screw, 5/16-18x2-3/4" (Used with 276A) |
| | 33662 | Hub & Screen Assy., Starter |
| | 29774 | Fuel Line (Braided 8-1/4")(21 cm)(As req.) |
| | 30705 | Fuel Line (Braided 16")(41 cm)(Use as req.) |
| 290 | 30962 | Fuel Line (Braided 32")(81 cm)(Use as req.) |
| 301 | 410144B | Fuel Cap (White Plastic)(Std)(1-1/2" I.D.) |
| 301 | 33032 | Fuel Cap (Red Plastic) (Spurt Resistant, Low Profile) (1-3/16" |
| | | I.D.) |
| 201 | 24240 | Fuel Can (Bad Blactic) (Shurt Begintent High Brafile) |
| 301 | 34210 | Fuel Cap (Red Plastic) (Spurt Resistant, High Profile) |
| | | (1-3/16" I.D) |
| 301 | 35355 | Fuel Cap (Red plastic) (1-1/2" I.D.) |
| | 33876 | Gasket, Stator |
| | 35038 | Spacer, Tank |
| | 34155 | Bracket, Fuel tank mounting |
| | 650561 | Screw, 1/4-20 x 5/8" |
| | 570682 | Primer Assy. |
| | 32180C | Primer Line |
| | | |
| 3/00 | 34387 | Decal, Instruction Can be used on HM80 with stamped steel |
| | | recoil starter. |
| 370.J | 34870 | Decal, Instruction Can be used on HM80 with diecast starter. |
| | 30547A | Contact Assy., Breaker |
| | 30548B | Condenser |
| | 35570 | Screen Seal (Can be used on HM80 with stamped steel |
| -100 | 555.0 | recoil starter) |
| | | recoil starter) |
| 409 | 35569 | Spacer (Can be used on HM80 with stamped steel recoil |
| | | starter) |
| 440 | 720572 | , |
| 410 | 730573 | Debris Screen Kit (Incl. 360, 370B, 387, 411 &413) (Can be |
| | | used on HM80 with stamped steel recoil starter) |
| 411 | 35568 | Debris Screen (Can be used on HM80 with stamped steel |
| | | recoil starter) |
| | | • |

For Discount Tecumseh Engine Parts Call 606-678-9623 or 606-561-4983 HM80-155254J Page 11 of 11 Engine Parts List #3

| Ref # | Part Number | Qty Description |
|-------|-------------|---|
| 413 | 650907 | Screw, 5/16-18 x 1-5/8" (Can be used on HM80 with stamped steel recoil starter) |
| 425 | 730572 | Starter Muff Kit (Incl. 370J, 426 & 427) (Can be used on HM80 with die cast starter) |
| 429 | 650868 | Screw, 8-18 \times 1-1/8" (3 Required) (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 430 | 611077 | Alternator, Add on (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 431 | 590609 | Centering tube (Use with engines equipped with die cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions) |
| 431 | 590610 | Centering tube (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611078 | A.C. Lighting Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 432 | 611079 | D.C. Charging Connector (Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590611 | Alternator Shaft (4.00") (Use with engines equipped with cast aluminum starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |
| 433 | 590636 | Alternator Shaft (Use with engines equipped with stamped steel starter)(Use as required) (Refer to Mechanics Handbook for installation instructions). |