

GRASS COLLECTOR OEM-190-731 / 190-731-081

This kit is designed to fit on Wide-Cut Combination Mowers.



WARNING!

BEFORE INSTALLING THIS ACCESSORY, SHUT THE UNIT'S ENGINE OFF AND ALLOW IT TO COOL. DISCONNECT SPARK PLUG WIRE FROM SPARK PLUG. REFER TO THE OPERATOR'S MANUAL FOR COMPLETE SAFETY INSTRUCTIONS. DO NOT OPERATE UNIT WITHOUT ENTIRE GRASS COLLECTOR IN PLACE. STOP BLADE BEFORE EMPTYING GRASS COLLECTOR.

Install Left Side Bracket

1. Shut off engine. Disconnect spark plug wire.
2. Remove lower screw (A, Fig. 1) and nut from left side handlebar.
3. Place bracket (B) as illustrated and secure to handlebar with screw (A) and nut.

Install Right Side Support Assembly

1. Remove lower screw (C, Fig. 2) and nut from right side handlebar.
2. Place support assembly (D) on right side handlebar. Install rod end through bracket (B), installed on left side.




Part #	Description	Qty.
1768623	Bracket (Bag Hanger)	1
1773678	Chute Assembly	1
1773682	Grass Bag (Includes Cable Tie)	1
1768239	Bag Hanger Rod	1
1774077	Support Assembly	1

Install Chute/Grass Bag Assembly

1. Lift discharge chute (F, Fig. 3) on deck.
2. Place front tab of chute/grass bag assembly (G) under retaining bracket (J) on deck. Place reinforced hole on chute over stud (K) beneath discharge chute. Secure safety latch (L) over bracket (J). Release chute.
3. Slide bag end tabs (H, Fig. 2) onto bag hanger rod (E).
4. Place hanger rod (E) in right side support assembly (D).
5. See opposite side for grass bag installation instructions.

Operation

1. **WARNING! Do not operate without entire grass collector in place. Stop blade before emptying grass collector.**
2. Empty bag when 3/4 full.
3. To empty bag, lift discharge chute (F, Fig. 3). Lift chute/bag assembly (G) from stud. Lift bag hanger rod (with bag) from right side support assembly. Unzip bag and empty.
4. Check grass collection bag frequently for deterioration and wear. Replace worn bag with new bag which meets Troy-Bilt/Bolens specifications.

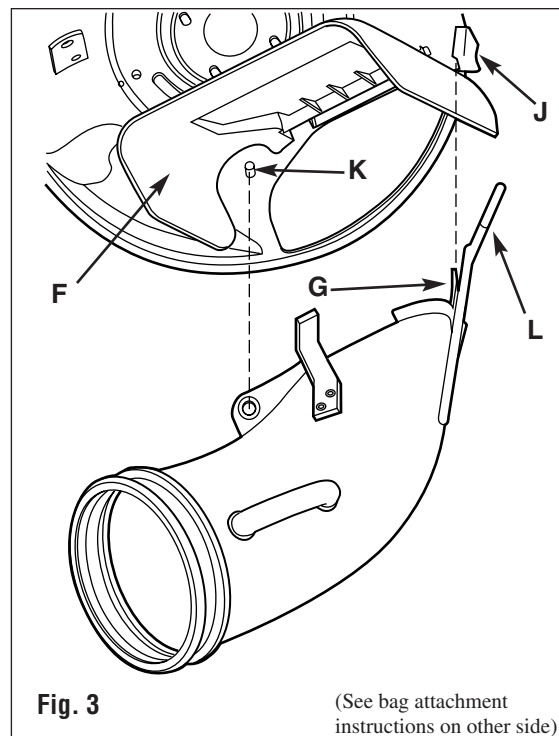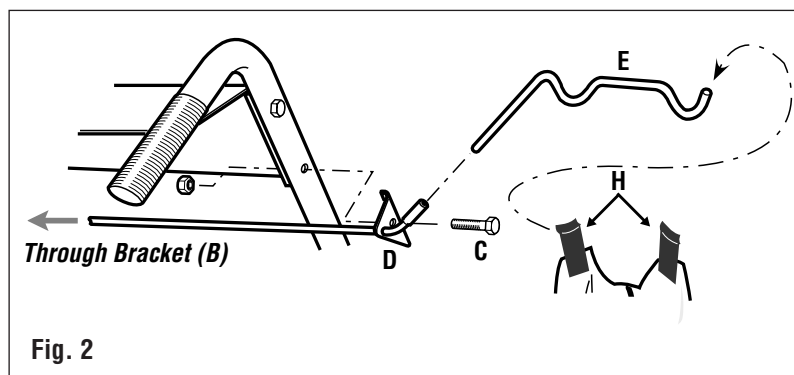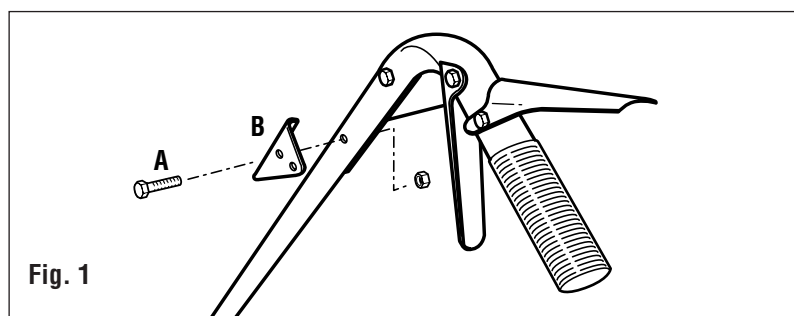



WARNING!

BEFORE INSTALLING THIS ACCESSORY, SHUT THE UNIT'S ENGINE OFF AND ALLOW IT TO COOL.
DISCONNECT SPARK PLUG WIRE FROM SPARK PLUG. REFER TO THE OPERATOR'S MANUAL FOR COMPLETE SAFETY INSTRUCTIONS.
DO NOT OPERATE UNIT WITHOUT ENTIRE GRASS COLLECTOR IN PLACE. STOP BLADE BEFORE EMPTYING GRASS COLLECTOR.

Grass Bag Installation

1. Place grass bag (A, Fig. 4) over chute assembly (B).
2. Insert pointed end of plastic cable tie (C) into eyelet end of cable tie. Make sure cable is positioned so it ties bag around indented groove portion (over flange) of chute. Pull cable tight with pliers.

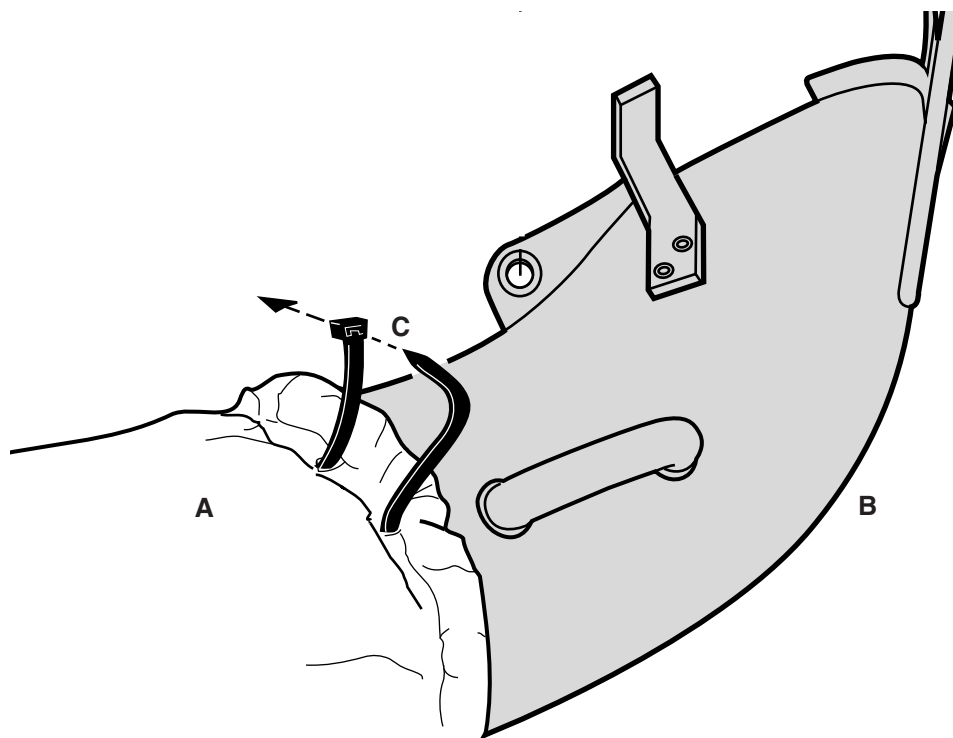


Fig. 4

For customer assistance, visit www.troybilt.com, contact your nearest authorized dealer or:

TROY-BILT LLC, P.O. BOX 361131, CLEVELAND, OHIO 44136-0019, 1-866-840-6483