




INSTALLATION INSTRUCTION FOR:
Double Rear Roller Kit (Fits Generation 2 Units w/ 48", 52" or 61" decks)

IMPORTANT: BEFORE PROCEEDING, PLACE ALL CONTROLS IN THE DISENGAGED OR THE OFF POSITION, REMOVE SPARK PLUG WIRES FROM THE SPARK PLUGS.

1. Raise the front of the mower high enough to allow adequate workroom under the rear of the deck, and support the mower with jack stands.
2. Install anti-scalp rollers in the baffle gusset at the rear center of the deck as shown. Rollers to be installed on both sides of gusset on all the decks 48", 52" and 61".
3. Make sure hardware is tight and roller spins freely.

539105422 - HCS 3/8C X 6 GD 8
539102643 - ANTI SCALP ROLLER
539102698 - BUSHING
539990517 - 3/8 FLAT WASHER
539990546 - 3/8 HLN 3/8C

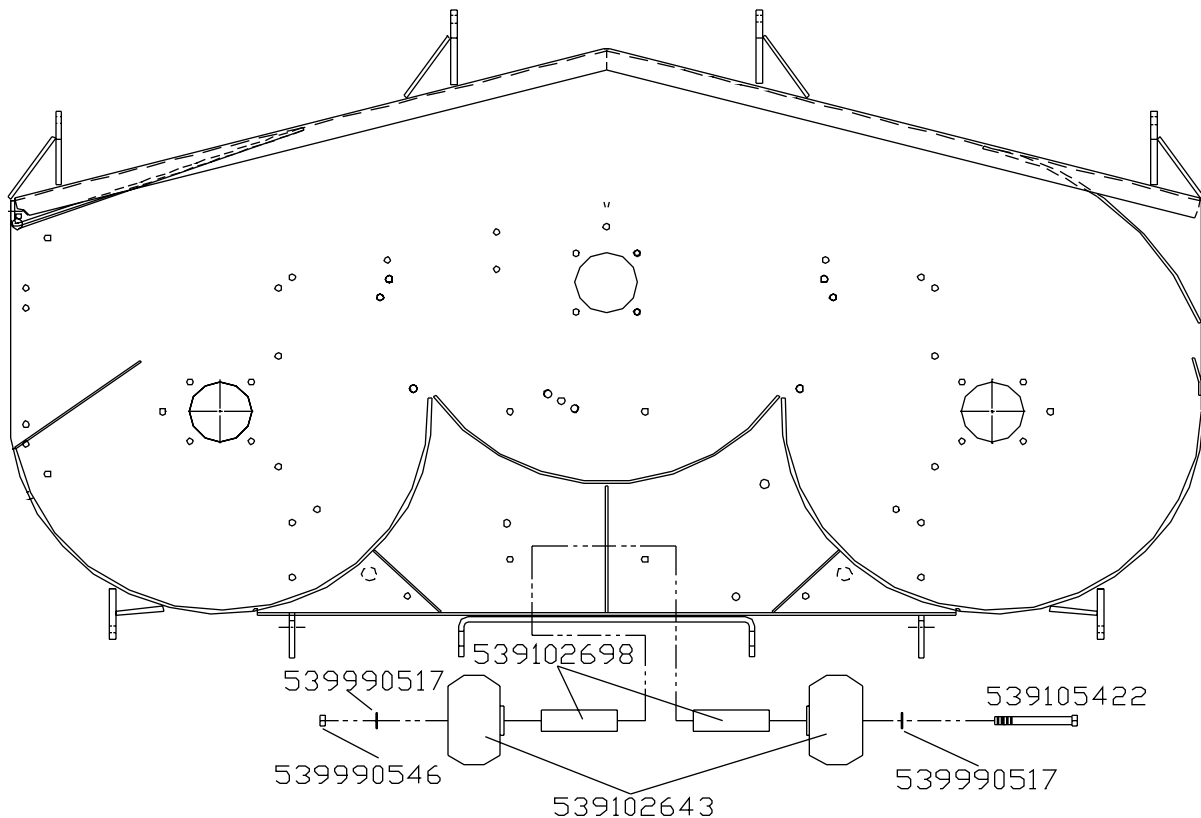

MANUAL NO. 539105423 REV. IR (09/26/00)